
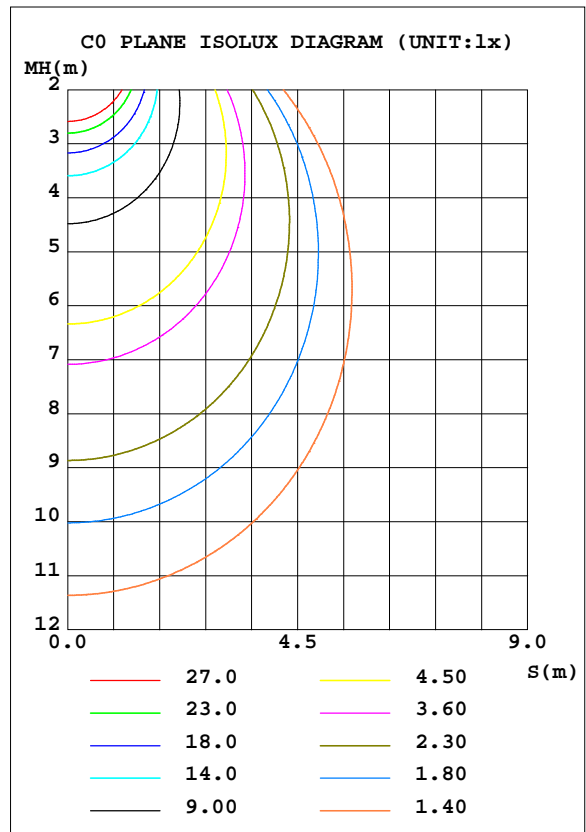


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.000V I:0.4206A P:10.090W PF:1.0000 Freq:50.00Hz Lamp Flux:564.31x1 lm		
NAME: 2316-DKB120.96.3K	TYPE:LED	
MFR.: Lightrail		

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax(cd)	180.7	S/MH(C0/180)	1.26
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	564.31	η UP, DN(C0-180)	2.2,47.5
NOMINAL FLUX(lm)	564.31	CIE CLASS	DIRECT	η UP, DN(C180-360)	2.2,48.0
LAMPS INSIDE	1	η up(%)	4.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	95.6	CIBSE SHR MAX	1.35

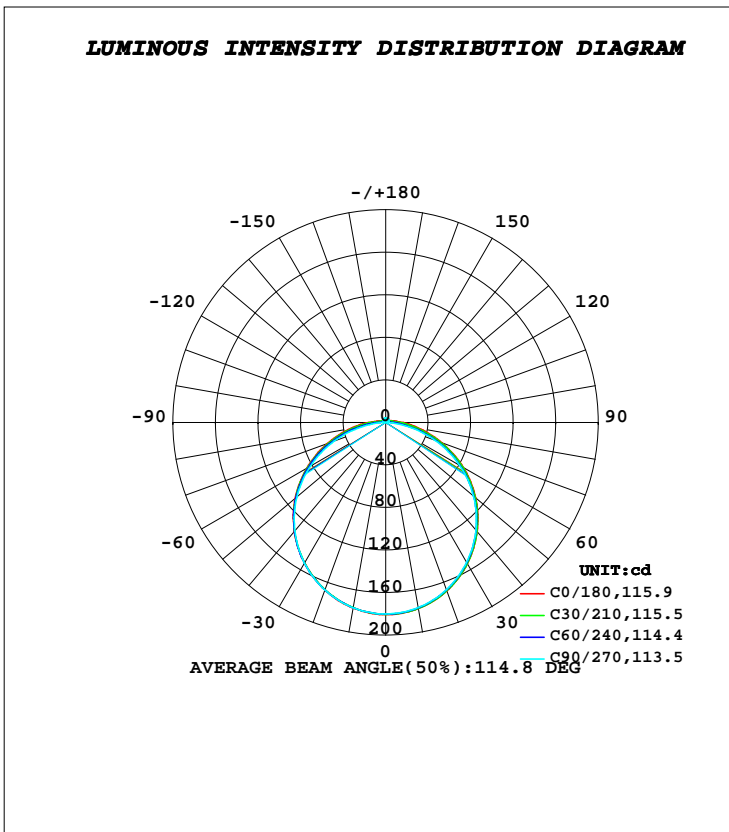

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-08-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	177.6	177.3	176.7	176.6	177.2	176.8	176.9	177.4	0- 10	17.06	17.06	3.02,3.02
20	168.6	168.0	167.2	167.1	167.5	167.4	167.6	168.3	10- 20	48.87	65.92	11.7,11.7
30	153.6	153.0	152.1	152.2	152.7	152.7	152.8	153.4	20- 30	74.16	140.1	24.8,24.8
40	133.8	133.0	132.1	132.7	133.9	133.5	133.0	133.6	30- 40	89.80	229.9	40.7,40.7
50	110.4	109.1	107.9	109.4	111.4	110.6	109.1	110.1	40- 50	94.03	323.9	57.4,57.4
60	84.23	82.12	80.00	83.01	85.59	84.19	81.55	83.09	50- 60	86.44	410.3	72.7,72.7
70	56.36	53.17	49.58	54.67	58.65	56.02	51.62	53.75	60- 70	68.06	478.4	84.8,84.8
80	31.68	25.94	19.17	27.62	33.87	28.79	21.14	26.31	70- 80	42.42	520.8	92.3,92.3
90	15.90	9.980	1.459	10.06	16.33	10.58	1.761	9.313	80- 90	18.51	539.3	95.6,95.6
100	8.488	5.018	1.761	4.451	7.560	4.632	1.911	5.359	90-100	7.368	546.7	96.9,96.9
110	5.279	3.142	2.134	2.950	4.854	3.069	2.234	3.343	100-110	4.197	550.9	97.6,97.6
120	2.924	2.546	2.526	2.577	2.730	2.661	2.585	2.667	110-120	2.859	553.8	98.1,98.1
130	2.977	2.936	2.926	2.998	3.032	3.016	2.948	2.997	120-130	2.505	556.3	98.6,98.6
140	3.359	3.308	3.332	3.401	3.356	3.360	3.302	3.319	130-140	2.445	558.7	99,99
150	3.714	3.676	3.736	3.772	3.677	3.701	3.668	3.659	140-150	2.209	560.9	99.4,99.4
160	4.065	4.028	4.096	4.113	4.012	4.019	4.021	3.996	150-160	1.787	562.7	99.7,99.7
170	4.316	4.298	4.359	4.368	4.258	4.271	4.305	4.277	160-170	1.182	563.9	99.9,99.9
180	4.397	4.409	4.460	4.453	4.397	4.412	4.465	4.470	170-180	0.4164	564.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-08-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.000V I:0.4206A P:10.090W PF:1.0000 Freq:50.00Hz Lamp Flux:564.31x1 lm		
NAME: 2316-DKB120.96.3K	TYPE:LED	
MFR.: Lightrail		

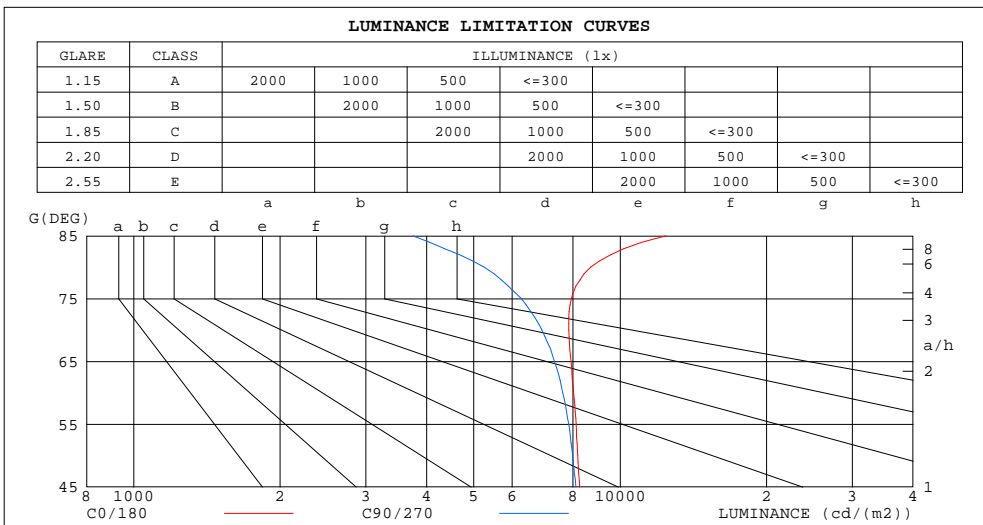

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	12404	3748
80	8687	5257
75	7934	6262
70	7846	6903
65	7925	7321
60	8022	7619
55	8120	7835
50	8176	7990
45	8252	8111


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-08-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.000V I:0.4206A P:10.090W PF:1.0000 Freq:50.00Hz Lamp Flux:564.31x1 lm		
NAME: 2316-DKB120.96.3K	TYPE:LED	
MFR.: Lightrail		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.03	1.03	1.03	.98	.98	.98	.96
1.0	1.02	.97	.93	.99	.95	.91	.94	.91	.88	.89	.87	.84	.85	.83	.81	.78
2.0	.88	.81	.75	.86	.80	.74	.82	.76	.72	.78	.73	.69	.74	.70	.67	.65
3.0	.77	.69	.62	.75	.68	.61	.72	.65	.60	.68	.63	.58	.65	.61	.57	.54
4.0	.68	.59	.52	.67	.58	.52	.64	.56	.51	.61	.55	.49	.58	.53	.48	.46
5.0	.61	.52	.45	.60	.51	.45	.57	.49	.44	.54	.48	.43	.52	.46	.42	.40
6.0	.55	.46	.39	.54	.45	.39	.51	.44	.38	.49	.43	.37	.47	.41	.37	.35
7.0	.50	.41	.34	.49	.40	.34	.47	.39	.34	.45	.38	.33	.43	.37	.33	.30
8.0	.45	.37	.31	.44	.36	.30	.43	.35	.30	.41	.34	.30	.40	.34	.29	.27
9.0	.41	.33	.28	.41	.33	.27	.39	.32	.27	.38	.31	.27	.36	.31	.26	.24
10.0	.38	.30	.25	.38	.30	.25	.36	.29	.24	.35	.29	.24	.34	.28	.24	.22

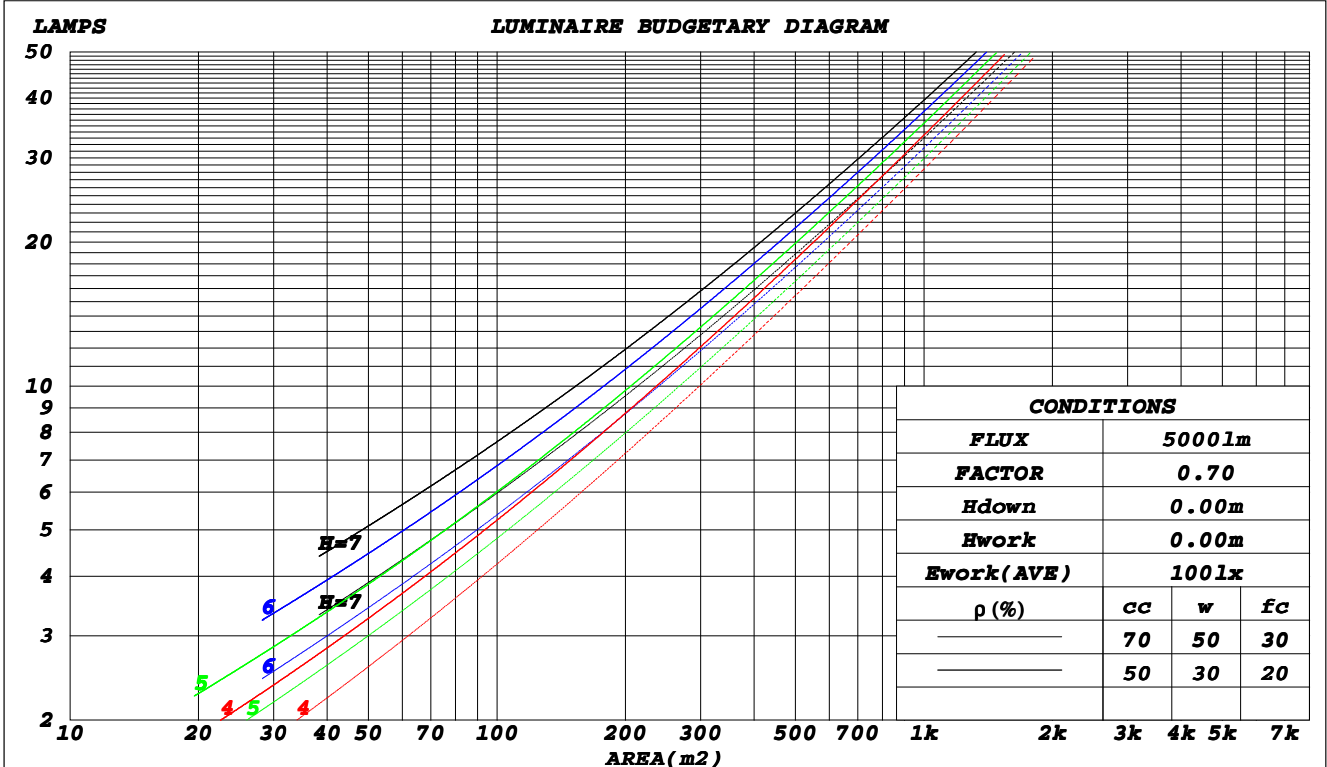

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-08-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:24.000V I:0.4206A P:10.090W PF:1.0000 Freq:50.00Hz Lamp Flux:564.31x1 lm		
NAME: 2316-DKB120.96.3K	TYPE:LED	
MFR.: Lightrail		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.328	.187	.059	.320	.182	.058	.304	.174	.056	.289	.167	.054	.276	.160	.052	
2.0	.302	.165	.051	.294	.162	.050	.280	.156	.048	.267	.150	.047	.255	.144	.045	
3.0	.276	.147	.044	.269	.144	.043	.257	.139	.042	.245	.134	.041	.234	.130	.040	
4.0	.253	.132	.039	.247	.129	.038	.236	.125	.037	.226	.121	.037	.216	.117	.036	
5.0	.233	.119	.034	.228	.117	.034	.218	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.216	.108	.031	.211	.106	.031	.202	.103	.030	.193	.100	.030	.185	.098	.029	
7.0	.200	.099	.028	.196	.098	.028	.188	.095	.027	.180	.092	.027	.173	.090	.026	
8.0	.187	.091	.026	.183	.090	.025	.175	.088	.025	.168	.085	.025	.162	.083	.024	
9.0	.175	.085	.024	.171	.083	.023	.164	.081	.023	.158	.079	.023	.152	.077	.022	
10.0	.164	.079	.022	.161	.078	.022	.155	.076	.021	.149	.074	.021	.144	.072	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.224	.224	.224	.192	.192	.192	.131	.131	.131	.075	.075	.075	.024	.024	.024	
1.0	.216	.190	.167	.184	.163	.144	.126	.112	.099	.073	.065	.058	.023	.021	.019	
2.0	.208	.166	.131	.178	.143	.113	.122	.099	.079	.070	.058	.046	.023	.019	.015	
3.0	.200	.149	.108	.172	.128	.093	.118	.089	.066	.068	.052	.039	.022	.017	.013	
4.0	.192	.136	.092	.165	.117	.080	.114	.082	.056	.066	.048	.033	.021	.016	.011	
5.0	.185	.125	.081	.159	.108	.071	.109	.076	.050	.063	.044	.030	.020	.015	.010	
6.0	.178	.117	.074	.153	.101	.064	.105	.071	.045	.061	.042	.027	.020	.014	.009	
7.0	.171	.110	.068	.147	.096	.059	.102	.067	.042	.059	.039	.025	.019	.013	.008	
8.0	.164	.105	.064	.141	.091	.055	.098	.064	.039	.057	.038	.023	.018	.012	.008	
9.0	.158	.100	.060	.136	.086	.052	.094	.061	.037	.055	.036	.022	.018	.012	.007	
10.0	.152	.095	.057	.131	.083	.050	.091	.058	.036	.053	.034	.021	.017	.011	.007	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-08-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.000V I:0.4206A P:10.090W PF:1.0000 Freq:50.00Hz Lamp Flux:564.31x1 lm		
NAME: 2316-DKB120.96.3K	TYPE:LED	
MFR.: Lightrail		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.9	21.4	20.2	21.7	22.0	19.7	21.2	20.0	21.5	21.8
3H	21.6	23.0	22.0	23.3	23.6	21.2	22.6	21.6	22.9	23.2
4H	22.3	23.7	22.7	24.0	24.3	21.8	23.1	22.2	23.4	23.8
6H	23.1	24.3	23.5	24.6	25.0	22.2	23.4	22.6	23.7	24.1
8H	23.4	24.6	23.8	25.0	25.3	22.3	23.4	22.7	23.8	24.2
12H	23.8	24.9	24.2	25.3	25.7	22.3	23.4	22.7	23.8	24.2
4H 2H	20.5	21.8	20.9	22.1	22.5	20.3	21.6	20.7	22.0	22.3
3H	22.4	23.5	22.8	23.9	24.3	22.0	23.2	22.4	23.5	23.9
4H	23.3	24.3	23.7	24.7	25.2	22.7	23.8	23.2	24.2	24.6
6H	24.1	25.1	24.6	25.5	26.0	23.2	24.2	23.7	24.6	25.1
8H	24.6	25.4	25.1	25.9	26.4	23.4	24.3	23.9	24.7	25.2
12H	25.1	25.9	25.6	26.3	26.8	23.5	24.3	24.0	24.7	25.2
8H 4H	23.6	24.4	24.0	24.9	25.3	23.1	23.9	23.5	24.4	24.9
6H	24.6	25.3	25.1	25.8	26.4	23.7	24.5	24.2	24.9	25.5
8H	25.2	25.8	25.7	26.3	26.9	24.0	24.6	24.5	25.1	25.7
12H	25.9	26.4	26.4	26.9	27.5	24.2	24.7	24.7	25.2	25.8
12H 4H	23.6	24.4	24.1	24.8	25.3	23.1	23.9	23.6	24.4	24.9
6H	24.7	25.3	25.2	25.8	26.4	23.9	24.5	24.4	25.0	25.5
8H	25.3	25.9	25.9	26.4	27.0	24.2	24.7	24.7	25.2	25.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 564.3 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -2.0)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-08-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.000V I:0.4206A P:10.090W PF:1.0000 Freq:50.00Hz Lamp Flux:564.31x1 lm		
NAME: 2316-DKB120.96.3K	TYPE:LED	
MFR.: Lightrail		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	55	43	36	54	43	36	53	42	36	29
0.80	65	53	46	64	53	45	62	52	45	38
1.00	73	62	54	72	61	54	69	62	53	46
1.25	80	69	62	79	68	61	76	67	60	52
1.50	85	75	68	83	74	67	80	72	66	57
2.00	92	83	76	90	82	75	86	79	73	65
2.50	96	88	82	94	86	80	90	83	78	69
3.00	100	92	86	97	91	85	93	87	82	73
4.00	104	98	93	101	96	91	96	92	88	78
5.00	107	101	97	104	99	95	98	95	91	81
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-08-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.000V I:0.4206A P:10.090W PF:1.0000 Freq:50.00Hz Lamp Flux:564.31x1 lm		
NAME: 2316-DKB120.96.3K	TYPE:LED	
MFR.: Lightrail		

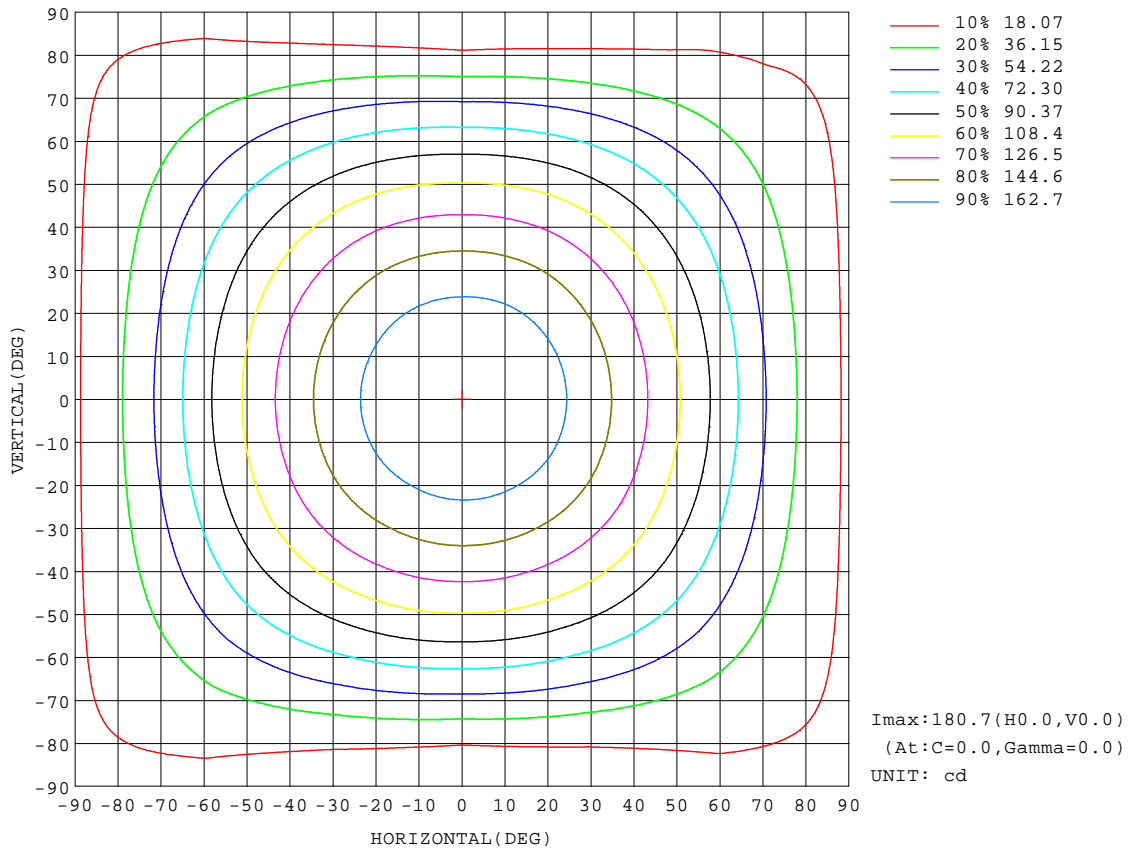


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-08-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:24.000V I:0.4206A P:10.090W PF:1.0000 Freq:50.00Hz Lamp Flux:564.31x1 lm		
NAME: 2316-DKB120.96.3K	TYPE:LED	
MFR.: Lightrail		

Flux out:385.9 lm

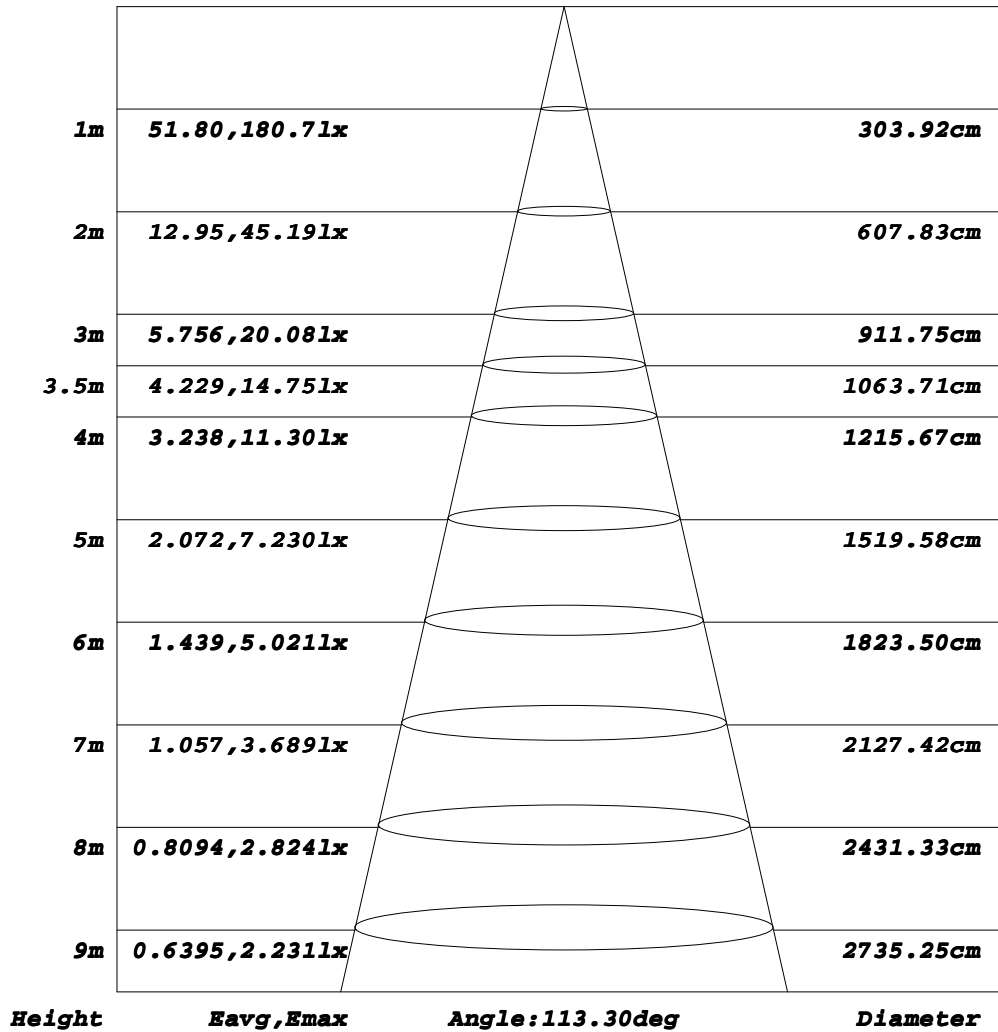


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-08-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:24.000V I:0.4206A P:10.090W PF:1.0000 Freq:50.00Hz Lamp Flux:564.31x1 lm		
NAME: 2316-DKB120.96.3K	TYPE:LED	
MFR.: Lightrail		

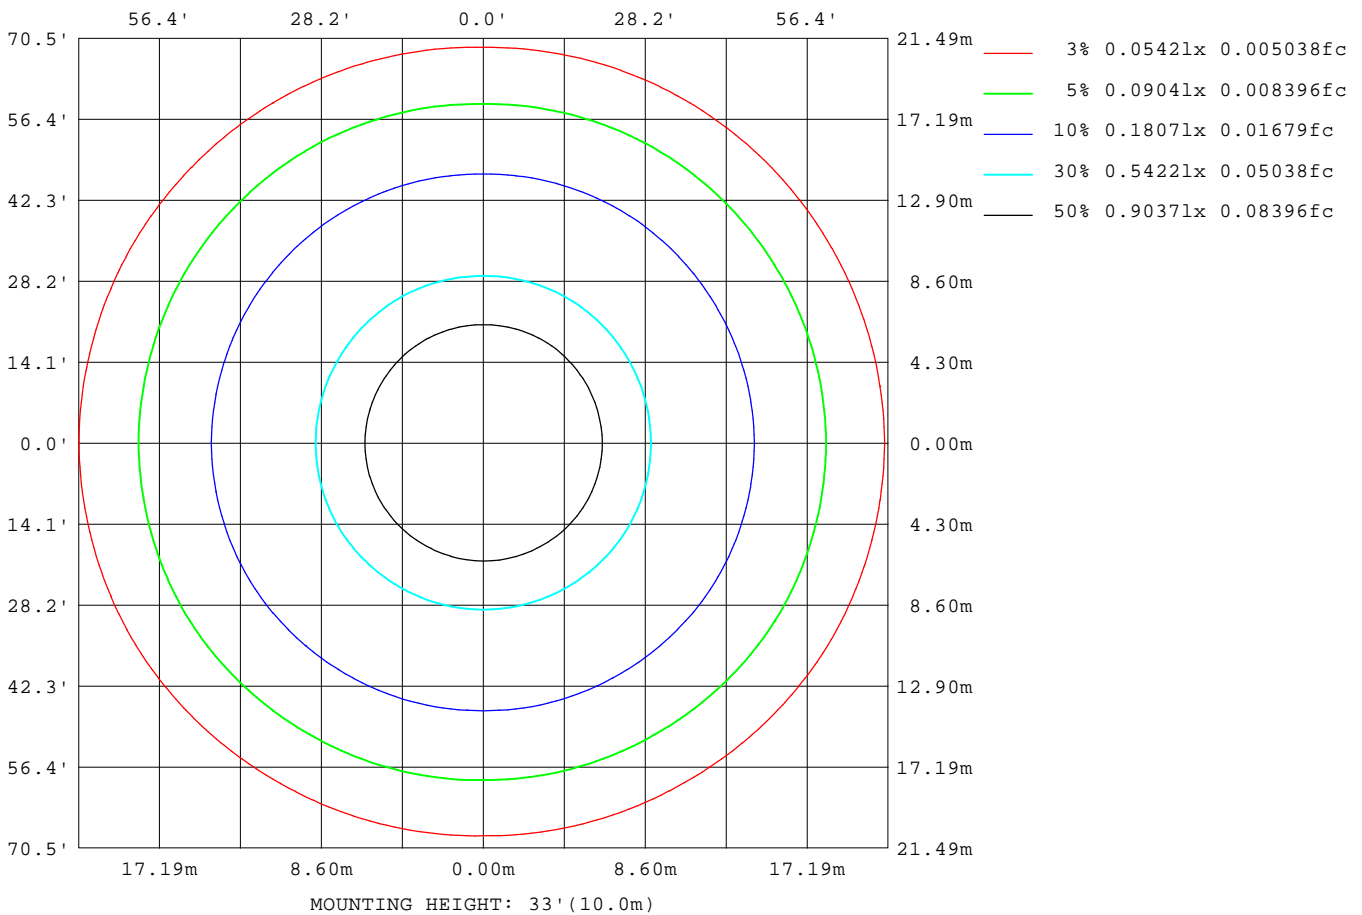

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-08-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

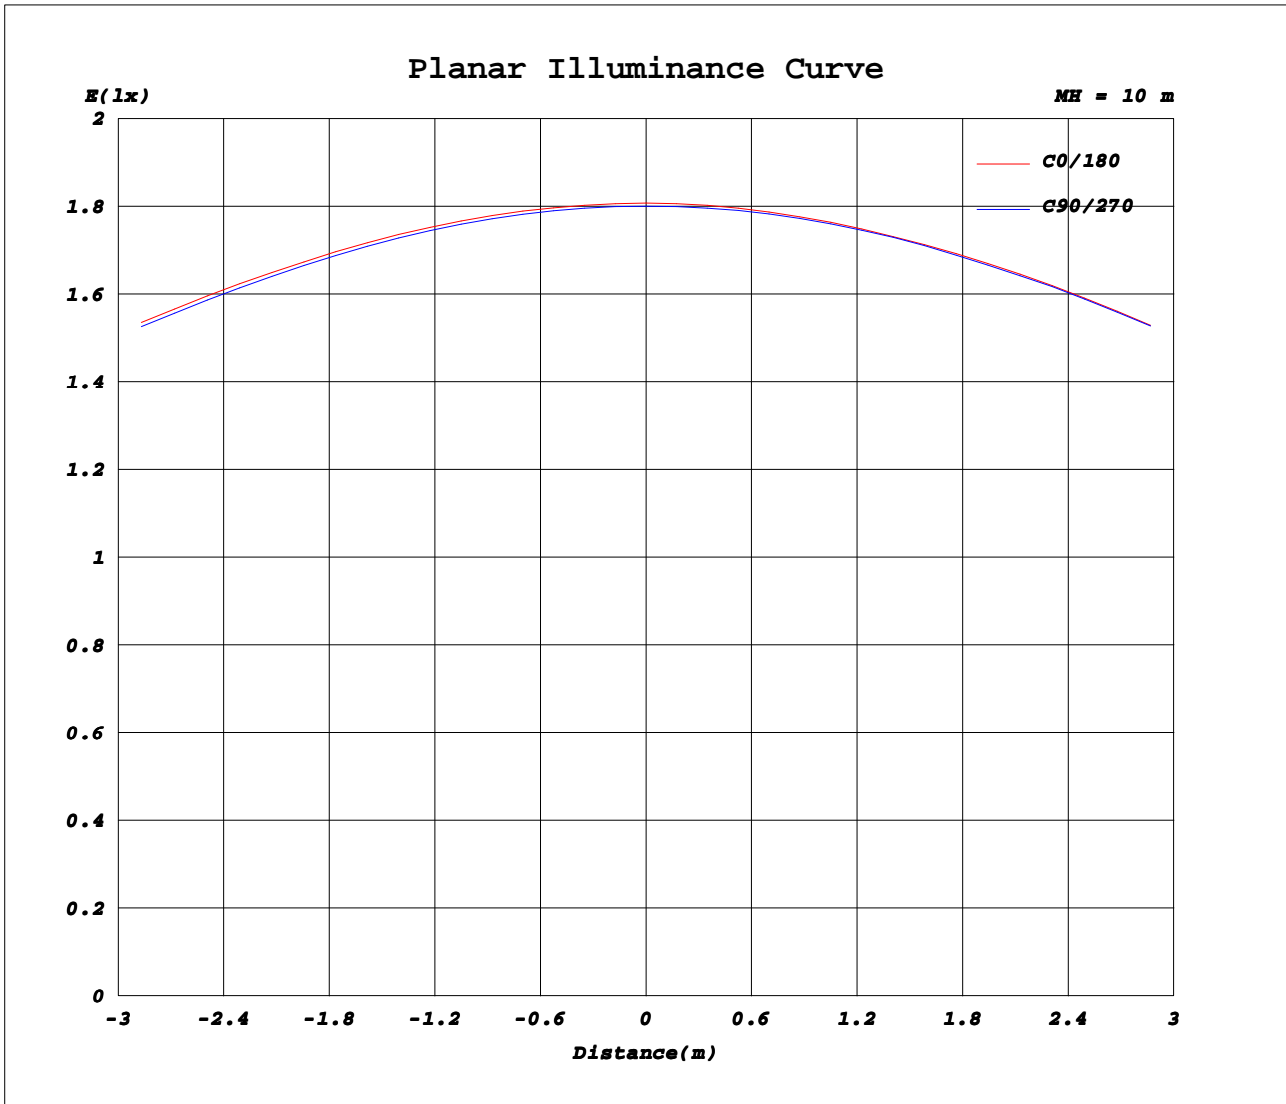

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-08-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.000V I:0.4206A P:10.090W PF:1.0000 Freq:50.00Hz Lamp Flux:564.31x1 lm		
NAME: 2316-DKB120.96.3K	TYPE:LED	
MFR.: Lightrail		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	181	180	180	180	180	180	181	180	180	180	180	180							
5	180	180	179	179	179	179	180	179	179	179	179	180	180						
10	178	178	177	177	176	177	177	177	177	177	177	177	178						
15	174	174	173	173	172	173	173	173	173	173	173	174	174						
20	169	168	168	167	167	167	167	167	168	168	168	168	168						
25	162	162	161	160	160	160	161	161	161	161	161	162	162						
30	154	153	152	152	152	153	153	153	153	153	153	153	153						
35	144	144	143	143	142	143	144	143	144	143	144	144	144						
40	134	134	132	132	132	133	134	133	134	133	134	134	134						
45	123	122	121	120	121	122	123	122	123	121	123	122	122						
50	110	110	108	108	108	110	111	111	111	109	110	110	110						
55	97.8	97.0	95.0	94.4	95.4	97.8	98.6	98.0	97.3	95.7	97.0	96.7	96.7						
60	84.2	83.5	80.8	80.0	81.5	84.5	85.6	84.8	83.6	81.6	82.9	83.2	83.2						
65	70.3	69.3	66.2	65.0	67.1	70.8	72.2	71.2	69.4	66.9	68.2	69.1	69.1						
70	56.4	55.0	51.3	49.6	52.4	57.0	58.7	57.3	54.7	51.6	53.1	54.4	54.4						
75	43.1	41.3	36.4	34.0	37.6	43.5	45.6	43.8	40.0	36.0	38.1	40.5	40.5						
80	31.7	29.3	22.6	19.2	24.0	31.2	33.9	31.5	26.1	21.1	24.3	28.3	28.3						
85	22.7	19.9	12.5	6.86	13.2	21.0	24.1	21.3	14.8	8.41	13.3	19.0	19.0						
90	15.9	13.3	6.71	1.46	6.63	13.5	16.3	13.7	7.47	1.76	6.50	12.1	12.1						
95	11.3	9.17	4.27	1.60	3.88	8.57	10.9	8.73	4.24	1.76	4.72	9.19	9.19						
100	8.49	6.86	3.18	1.76	2.93	5.97	7.56	6.09	3.17	1.91	3.60	7.12	7.12						
105	6.70	5.35	2.27	1.95	2.08	4.77	5.97	4.90	2.30	2.07	2.62	5.67	5.67						
110	5.28	4.12	2.17	2.13	2.15	3.75	4.85	3.86	2.28	2.23	2.28	4.41	4.41						
115	4.04	3.02	2.35	2.33	2.35	2.73	3.76	2.83	2.45	2.41	2.44	3.28	3.28						
120	2.92	2.57	2.53	2.53	2.55	2.60	2.73	2.69	2.63	2.58	2.61	2.73	2.73						
125	2.77	2.76	2.72	2.73	2.77	2.79	2.86	2.87	2.80	2.77	2.78	2.89	2.89						
130	2.98	2.96	2.91	2.93	2.99	3.01	3.03	3.05	2.99	2.95	2.94	3.06	3.06						
135	3.17	3.15	3.10	3.13	3.18	3.21	3.19	3.22	3.16	3.12	3.10	3.21	3.21						
140	3.36	3.33	3.29	3.33	3.39	3.42	3.36	3.38	3.34	3.30	3.28	3.36	3.36						
145	3.54	3.50	3.48	3.54	3.58	3.60	3.51	3.54	3.52	3.49	3.45	3.53	3.53						
150	3.71	3.68	3.67	3.74	3.76	3.78	3.68	3.71	3.69	3.67	3.63	3.69	3.69						
155	3.89	3.85	3.85	3.92	3.94	3.95	3.84	3.86	3.86	3.85	3.80	3.85	3.85						
160	4.07	4.02	4.04	4.10	4.11	4.12	4.01	4.01	4.03	4.02	3.98	4.01	4.01						
165	4.21	4.17	4.19	4.24	4.25	4.26	4.15	4.14	4.18	4.18	4.14	4.16	4.16						
170	4.32	4.28	4.31	4.36	4.36	4.37	4.26	4.25	4.29	4.31	4.27	4.28	4.28						
175	4.38	4.36	4.40	4.44	4.44	4.45	4.34	4.33	4.39	4.40	4.39	4.38	4.38						
180	4.40	4.38	4.44	4.46	4.46	4.45	4.40	4.39	4.44	4.47	4.47	4.47	4.47						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-08-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: