



- **6063 anodized aluminium**
- **Opal PC diffuser**
- **Standard length 2m**

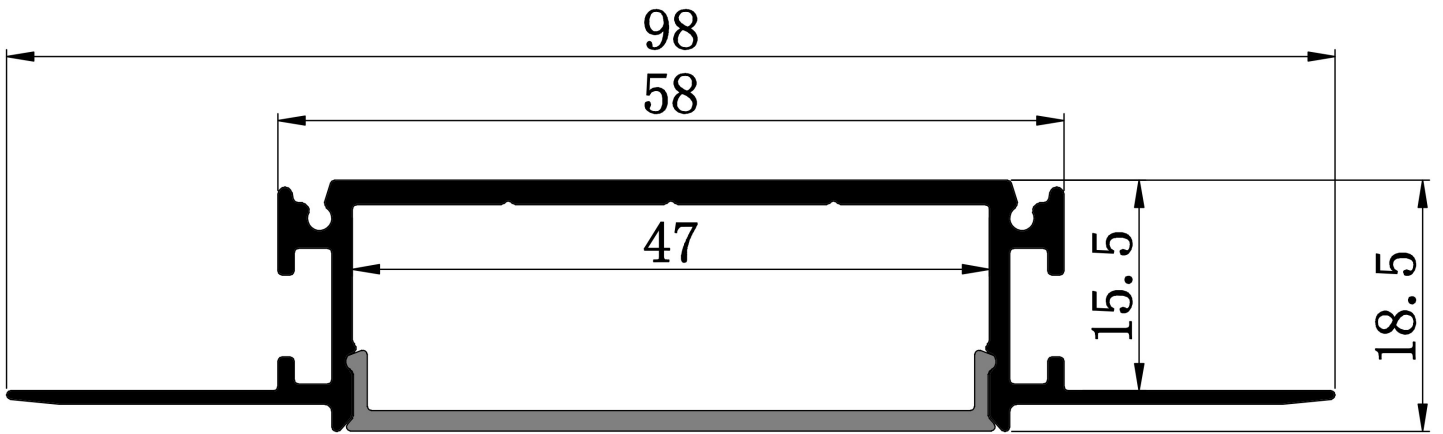


Technical specifications:


Ingress Protection Rating:	IP20 (standard)
Available lengths:	1m / 2m/ 3m (can be cut to any size)
Material:	Body – aluminum, cover – polycarbonate (PC), end cap – polypropylene
Lighting Transmittance:	Frosted Cover, 70-90%;
Operating temperature range:	-30~+100°C
Flammability:	V2 Fire Rating for PC Cover.
UV stability:	Ageing resistance more than 3 years.
Heat stability:	Under 100°C.
UL94 rating:	UL94V2
Manufacturing tolerances:	±0.5mm.
Grade of aluminum:	6063-T5
Grade/Type of anodizing:	Ecrú oxidation and Grind arenaceous oxidation
Heat transmission properties:	Aluminum specific heat is $0.88 \times 10^3 \text{ J}/(\text{Kg} \times ^\circ\text{C})$

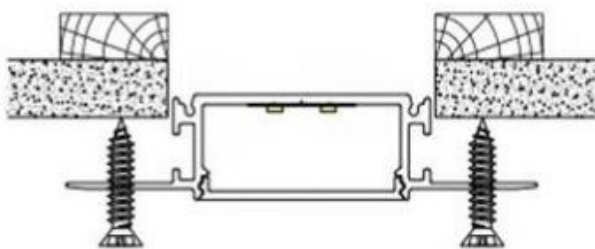


STEP1

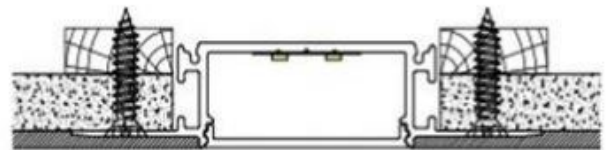

STEP2

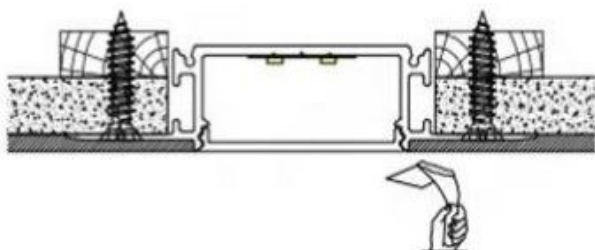

STEP3

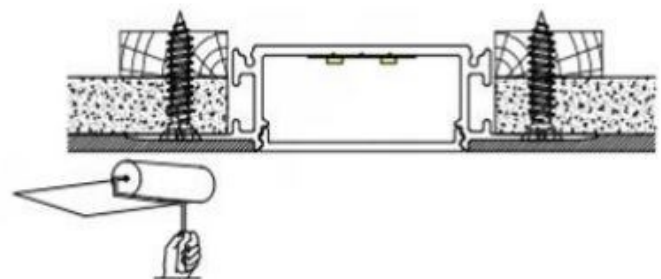

STEP4

