

3014 Side View strip Datasheet



Features

* LED type: Super bright SMD 3014 LED

* LED Qty: 60,84,156 LEDs/m

* PCB Dimension: 5000* 8 or 10mm

* Waterproof Grade: IP20

* Lifetime: 50000h


Application

- * Decorative lighting for festivals, events, shows, exhibitions
- * Architectural lighting for canopy, corridor, window, archway,
- * Backlight or edge light for signage
- * Path or contour marking
- * Channel letter lighting

Strip parameters

Model No.	LED Type	LED Q tý /roll (pcs)	Colour	CRI	Each cut Length	Input voltage (V DC)	Lumen of each meter (Im/meter)	Max Power of each meter (W)	Dimensions length / wide (mm)	Continuous Connection Max (mm)
SL60	3014 LED	300	white	Ra>80	50mm in 12V 100mm in 24V	12 / 24	780 ±10%	7.2	5000 / 10	10000
SL84		420	white	Ra>80	71.4mm	24	800 ±10%	10	5000 / 10	10000
SL156		780	white	Ra>80	38.4mm	24	1500±10%	15.6	5000 / 8	10000

CCT available: 2700K, 3000K, 4000K, 6000K

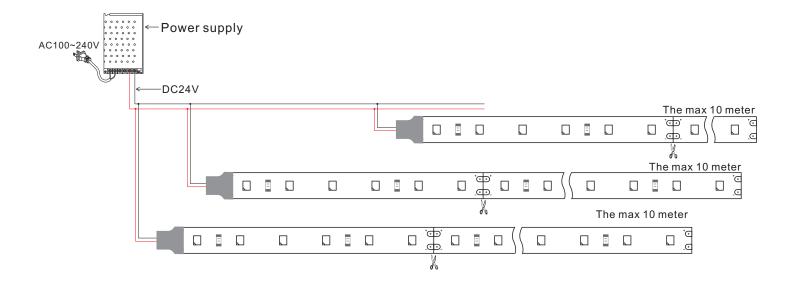

nstallation Two methods for users to install this strip:



Method A:

To use screws and clips to fix the strip.



Method B:

To stick 3M adhesive tape to the back of silicone tube.

Note and Warranty

3 Years Warranty