





POD 37 LED Handrail Light by Lightrail





- Compact, sleek appearance design
- High strength die-cast aluminium housing
- Adopts the anti-theft design fixed by rotation
- Self-contained stainless steel elastic bracket
- Optical dark-free zone design for seamless splicing of light
- International standard DMX512 protocol
- Mounting elastic buckle
- Waterproof IP66 rating
- Osram LED's






POD 37 LED Handrail Light by Lightrail

- Compact, sleek appearance design
- High strength die-cast aluminium housing
- Adopts the anti-theft design fixed by rotation
- Self-contained stainless steel elastic bracket
- Optical dark-free zone design for seamless splicing of light
- International standard DMX512 protocol
- Mounting elastic buckle
- Waterproof IP66 rating



H (m)	E (lx)	D (m)	
		C ₁	C ₂
		70°	55°
1	135	1.40	1.04
2	34	2.80	2.08
3	15	4.20	3.12
4	8	5.60	4.16
5	5	7.00	5.21




POD 37 LED Handrail Light

Specification

Power Consumption	2W
Luminous Flux	130 lm @4000K
Color Temperature	2700K / 3000K / 4000K / 5000K / 5700K / 6500K
Beam Angle	(50%Imax) 55*70°
LED Brand	CREE / NICHIA / OSRAM / LUMILEDS
Input Voltage	DC24V
Protection	Class IEC III
Control	ON-OFF
Finish	Anti-corrosion treatment and high-temperature spraying
Housing	Die-cast aluminum ADC12
Cover	PC
IP Rating	IP66
IK Rating	IK08
Mounting	Recessed
Operating Temperature	-35°C ~ 60°C(-31°F ~ 140°F)
Storage Temperature	-40°C ~ 70°C(-40°F ~ 158°F)
Lifespan	>50,000Hrs(Ta=35°C@L70)
Certificate	CE / RoHS / EMC



POD 37 LED Installation

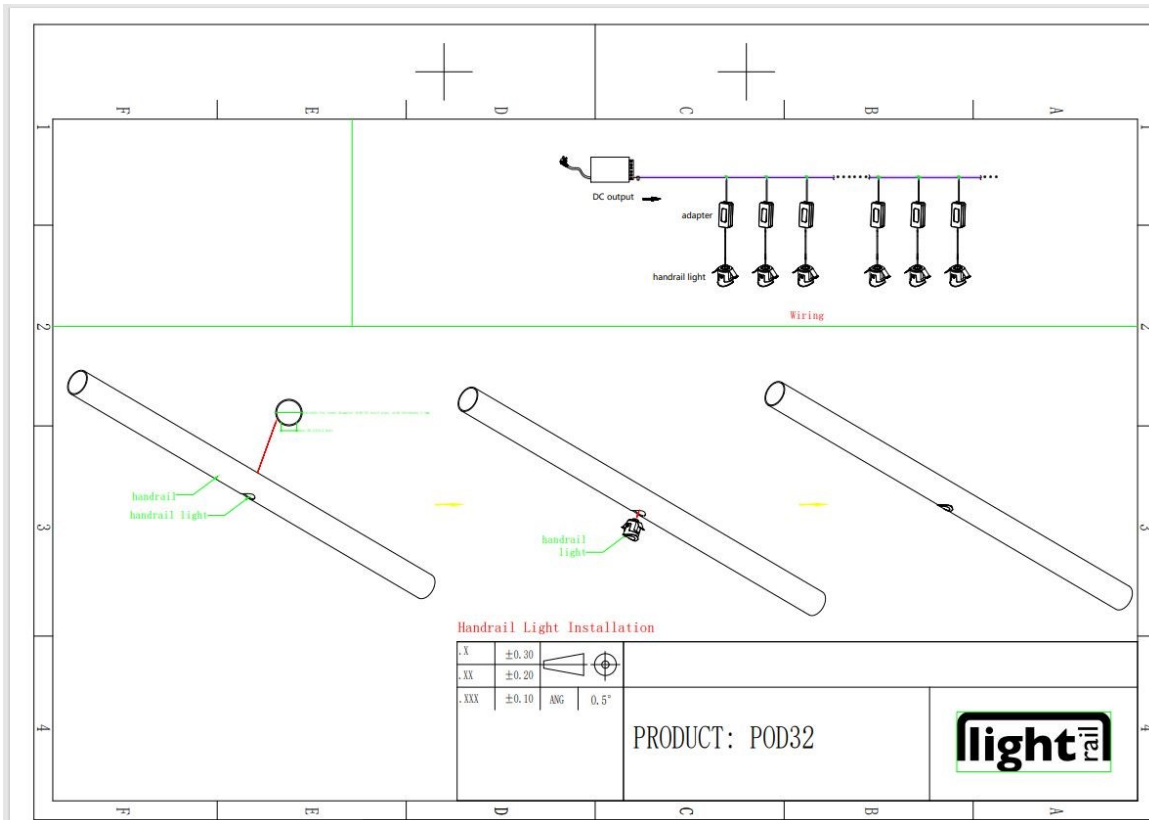

POD 37 LED Handrail Light maintenance

- Easy maintenance using Lightrail POD removal tool
- Supplied separately

