

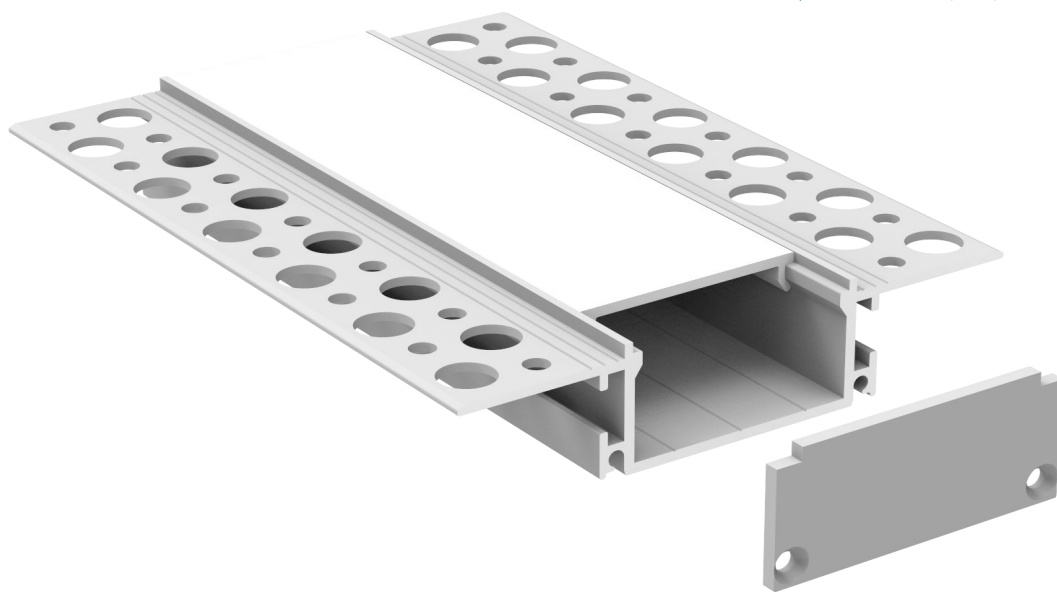
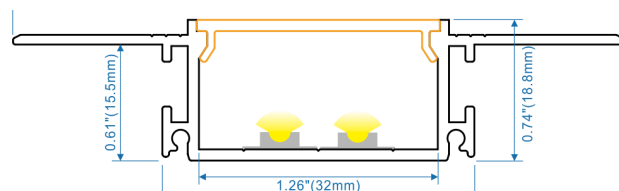
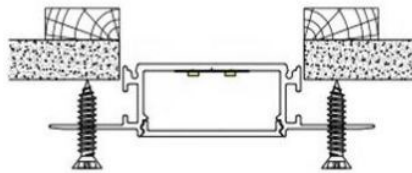


**LED PROFILE TRIMLESS RECESSED**


- 6063 anodized aluminium
- Opal PC diffuser
- Standard length 2m

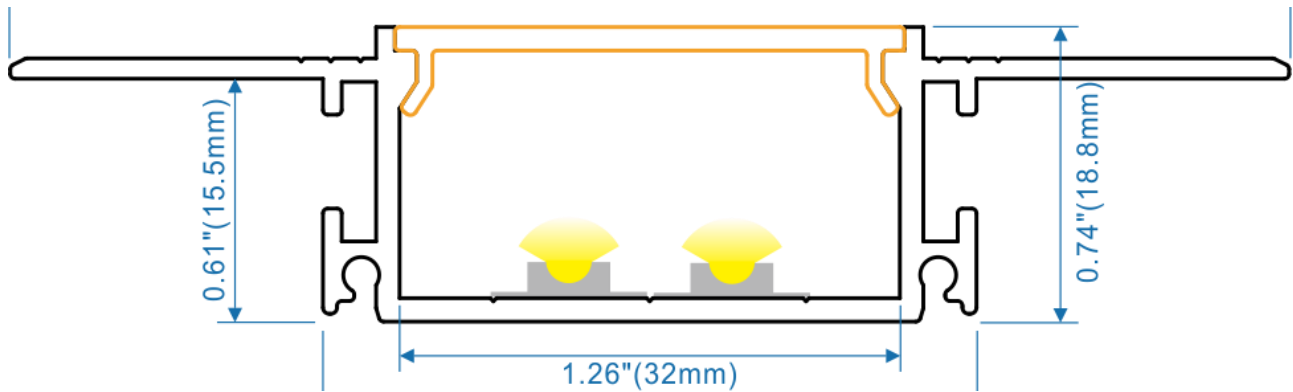


STEP 1



STEP 2

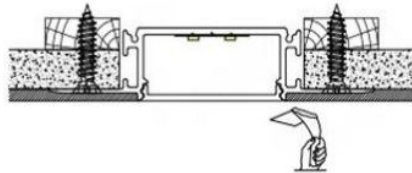

STEP 3

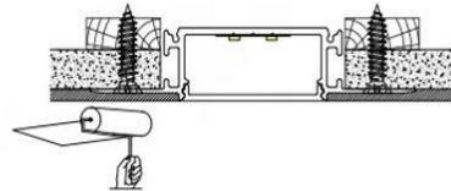

STEP 4

Technical specifications:

Ingress Protection Rating:	IP20 (standard)
Available lengths:	1m / 2m/ 3m (can be cut to any size)
Material:	Body – aluminum, cover – polycarbonate (PC), end cap – polypropylene
Lighting Transmittance:	Frosted Cover, 70-90%;
Operating temperature range:	-30~+100°C
Flammability:	V2 Fire Rating for PC Cover.
UV stability:	Ageing resistance more than 3 years.
Heat stability:	Under 100°C.
UL94 rating:	UL94V2
Manufacturing tolerances:	±0.5mm.
Grade of aluminum:	6063-T5
Grade/Type of anodizing:	Ecru oxidation and Grind arenaceous oxidation
Heat transmission properties:	Aluminum specific heat is 0.88x10J/(Kg x °C)