





17x7mm



ALUMINUM PROFILE

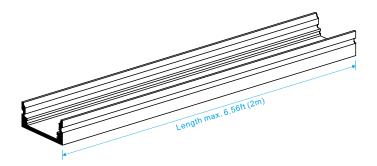


- ♦ 6063 T5 Anodised aluminium
- ♦ Heat Sink and physical protection to the LEDs
- ◆ Suitable for Max. 12mm width LED flexible strips
- ♦ Available length 2m



DIFFUSER

This opal polycarbonate diffuser is made from premium quality material enabling up to 86% light transmission. It provides LED protection and reduces visual LED light points

| Color | Opal |
|-----------------------|---------------|
| Material | PC |
| Working Temperature | -50°C ~ 100°C |
| Light Transmission | 86% |
| Coefficient Diffusion | Medium |
| Method of Assembly | Push in |

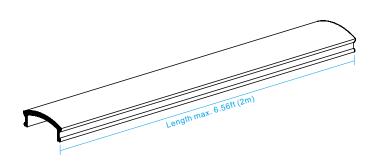


Polycarbonate Diffuser


- 1.Clear
- 2.Opal (standard)
- 3.Matt Black




INSTALLATION GUIDE


METHOD 1 - SURFACE MOUNTING WITH CLIPS





METHOD 2 - SURFACE MOUNTING WITHOUT CLIPS





NOTE: Fixing screws must be fully recessed and provide flat surface for LED

Page 3 of 3 www.lightrail.net.au