





- 👍 Long run 20meters
- 👍 Constant current with IC
- 👍 CRI>90, R9>50
- 👍 No lumen different head to end
- 👍 IP65, IP67 are available
- 👍 Max 20meter power at single end


IP rate



Dimensions

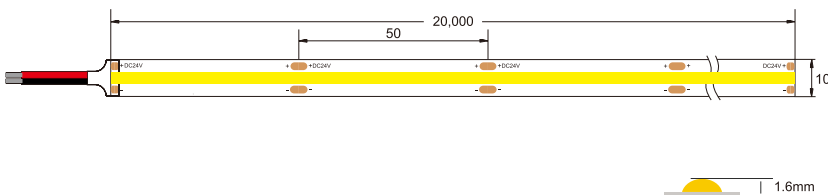

ERP Energy Class



Electrical Data

- LED type: COB
- Number chips/m: 480chips/m
- Power W/m: 5W/m
- PCB width: 10mm
- Length: 20m

Standards / Normative Requirements

- Protection class: EN60529
- Safety Requirements: EN62031 / IEC60598
- EMC/radio disturbance characteristics: EN55015
- ROHS: Yes
- CE: Yes

Product Parameters

Product code	Color	CRI	R9	Power (W/M)	Efficiency (LM/W)	Lumen (LM/M)	Voltage (V/DC)	Cut unit	SDCM	Max
COB480.LR5.27K	2700K	>90	>50	5	75	375	24	50mm	<3	20meter
COB480.LR5.3K	3000K	>90	>50	5	80	400	24	50mm	<3	20meter
COB480.LR5.4K	4000K	>90	>50	5	90	450	24	50mm	<3	20meter
COB480.LR5.6K	6000K	>90	>50	5	90	450	24	50mm	<5	20meter