

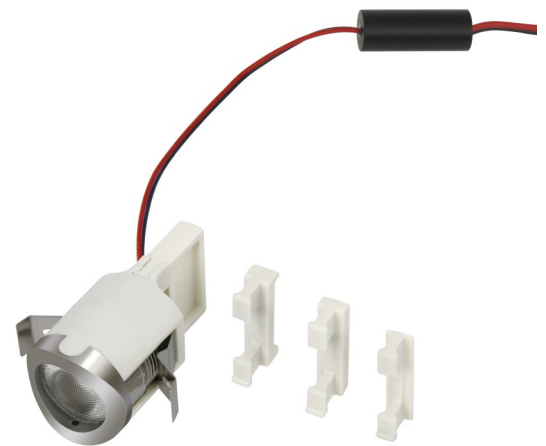
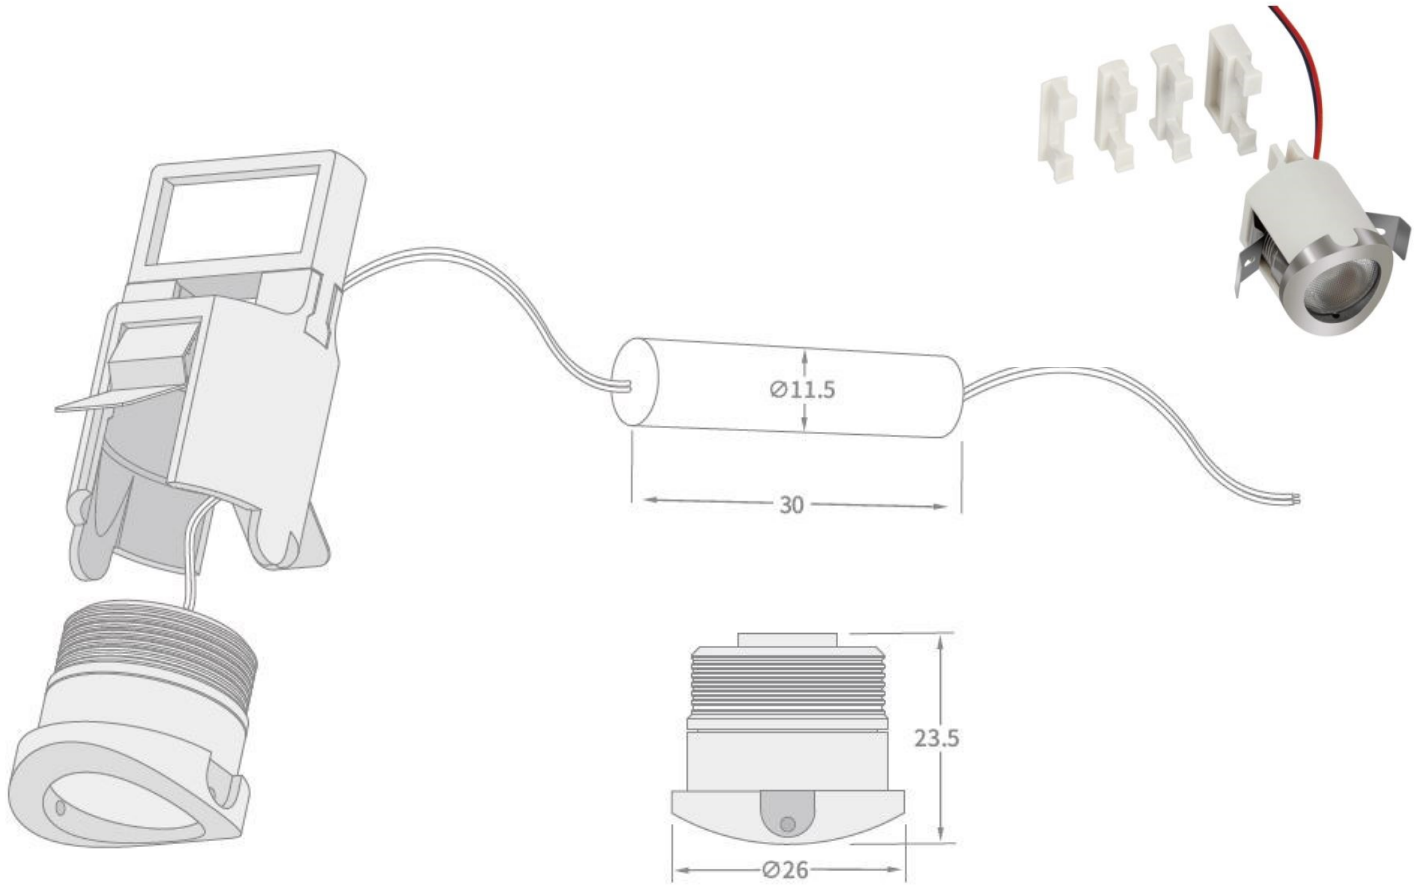





## POD 26 LED Handrail Luminaire


- 316 grade stainless steel housing
- 1.5w Cree LED > 30 000hrs | 80lm/w
- 24v DC constant voltage
- IP67 | CRI >80 | 121lm
- Available from 2700-6000k
- Adaptors to suit multiple tube sizes





|                       |   |   |   |   |   |
|-----------------------|---|---|---|---|---|
| <b>Outer Diameter</b> | Ø38.0mm   | Ø38.0mm   | Ø42.2mm   | Ø42.2mm   | Ø48.3mm   |
| <b>tube Thickness</b> | 3.0mm   | 1.80mm  | 3.56mm  | 1.80mm  | 3.68mm  |
|                       |  |  |  |  |  |

Flux out: 69.29 lm

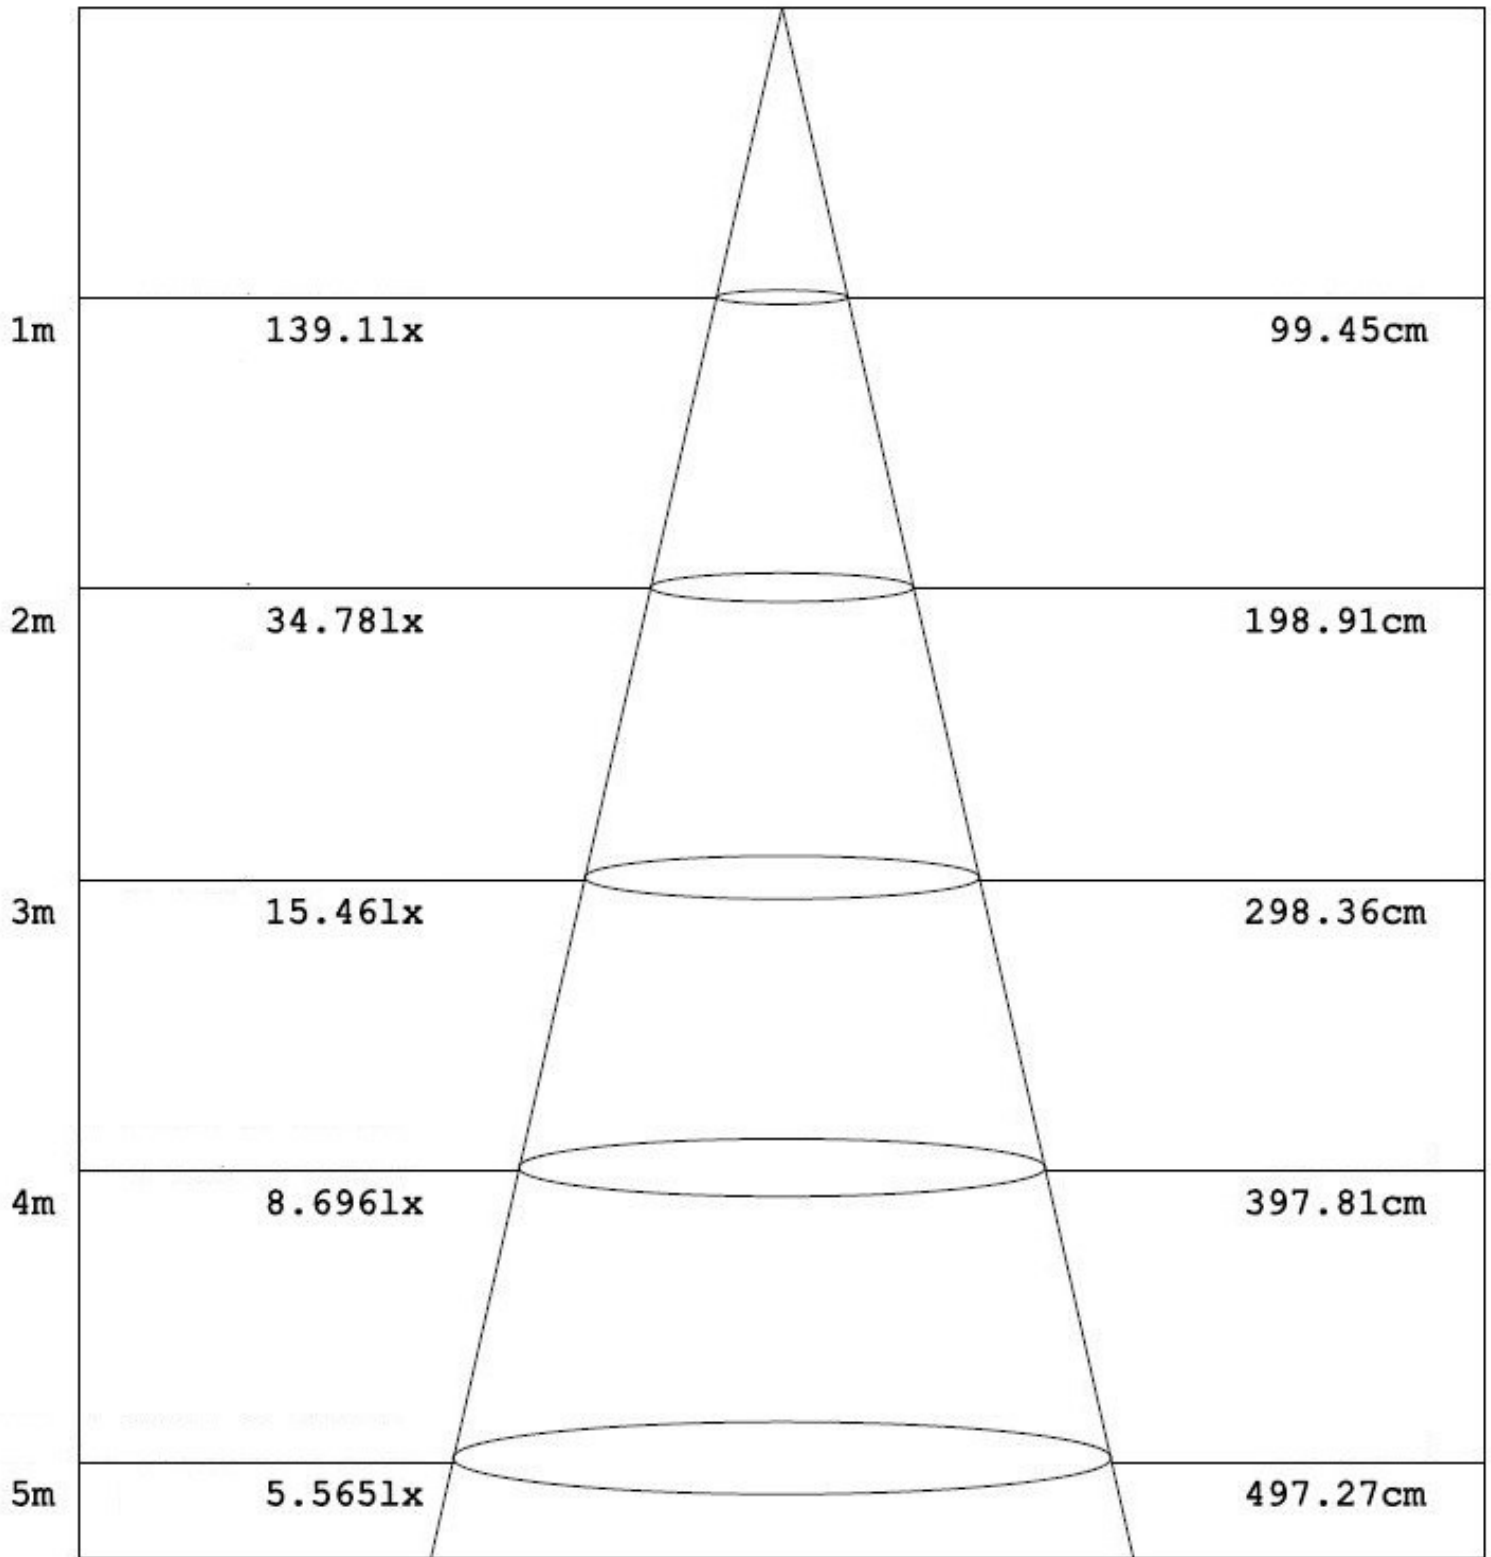

Eavg, Emax

Angle: 52.88deg

Diameter



| ORDER CODE | V  | W   | CRI > | COL TEMP | LM/W | MAX WPD |
|------------|----|-----|-------|----------|------|---------|
| POD26.27K  | 24 | 1.5 | 80    | 2700K    | 80   | 100     |
| POD26.3K   | 24 | 1.5 | 80    | 3000K    | 80   | 100     |
| POD26.4K   | 24 | 1.5 | 80    | 4000K    | 80   | 100     |
| POD26.6K   | 24 | 1.5 | 80    | 6000K    | 80   | 100     |

