




- Can match all RGBW controllers
- RGB+2700K, 3000K, 6500K
- CRI>90, R9>50
- Short cut 31.25mm
- IP65, IP67 are available
- Max 5meter power at single end


Application effect



IP rate



Dimensions

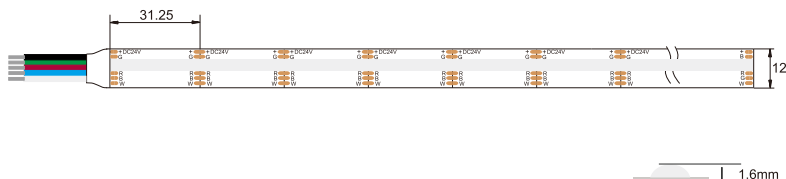

Electrical Data

- LED type: COB
- Number chips/m: 896chips/m
- Power W/m: 20W/m
- PCB width: 12mm
- Length: 5m

Standards / Normative Requirements

- Protection class: EN60529
- Safety Requirements: EN62031 / IEC60598
- EMC/radio disturbance characteristics: EN55015
- ROHS: Yes
- CE: Yes

Product Parameters

Product code	Color	Wavelength (nm)	R9	Power (W/M)	Efficiency (LM/W)	Lumen (LM/M)	Voltage (V/DC)	Cut unit	SDCM	Max
COB896.20.RGBW	RED	620-625	/	6	26	156	24	31.25mm	/	5meter
COB896.20.RGBW	GREEN	520-525	/	4	97	388	24	31.25mm	/	5meter
COB896.20.RGBW	BLUE	465-470	/	5	18.5	92.5	24	31.25mm	/	5meter
COB896.20.RGBW.27K	2700K	>90	>50	5	62	310	24	31.25mm	/	5meter
COB896.20.RGBW.3K	3000K	>90	>50	5	65	325	24	31.25mm	/	5meter
COB896.20.RGBW	RGBW	/	/	20	41.8	836	24	31.25mm	/	5meter