
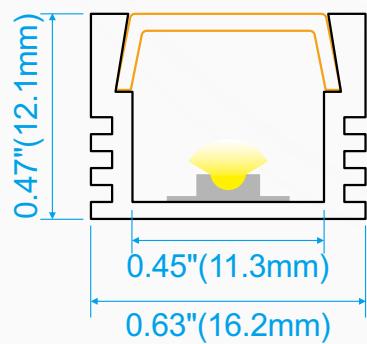



XD1612 | 16x12mm

ALUMINUM PROFILE

light rail

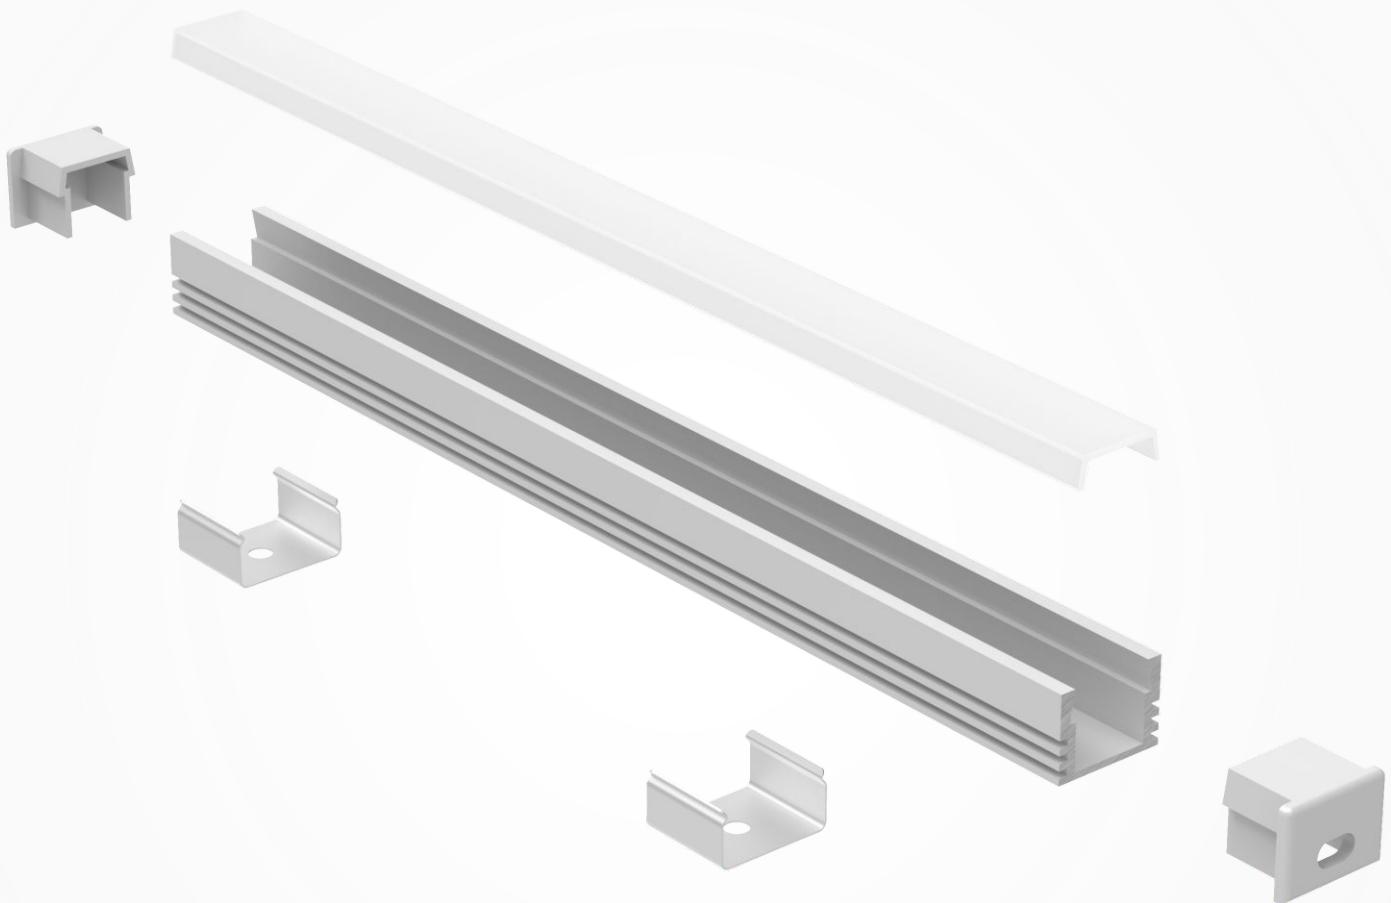

ALUMINUM PROFILE

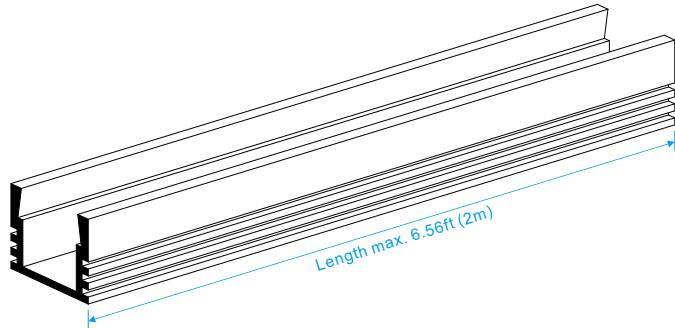

Powder Coat White



Silver Anodized
* standard color




Black Anodized

- ◆ 6063 T5 Anodised aluminium
- ◆ Heat Sink and physical protection to the LEDs
- ◆ Suitable for Max. 10mm width LED flexible strips
- ◆ Available length 2m

DIFFUSER

This opal polycarbonate diffuser is made from premium quality material enabling up to 86% light transmission. It provides LED protection and reduces visual LED light points


| | |
|-----------------------|---------------|
| Color | Opal |
| Material | PC |
| Working Temperature | -50°C ~ 100°C |
| Light Transmission | 86% |
| Coefficient Diffusion | Medium |
| Method of Assembly | Push in |

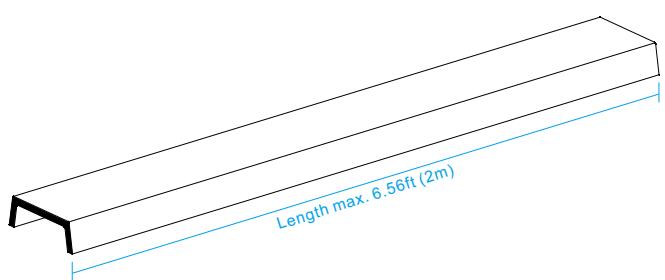


Polycarbonate Diffuser
1.Clear
2.Opal (standard)
3.Matt Black

INSTALLATION GUIDE

METHOD 1 - SURFACE MOUNTING WITH CLIPS

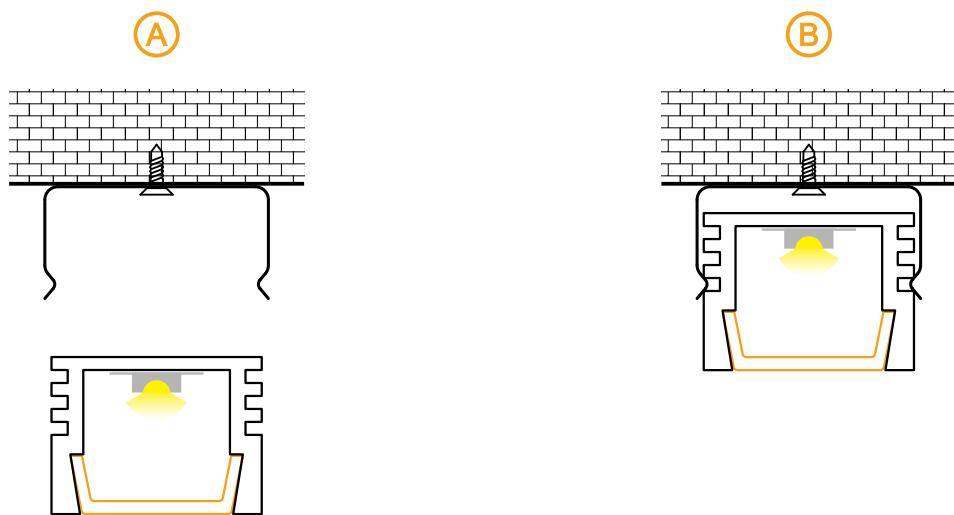

METHOD 2 - SURFACE MOUNTING WITHOUT CLIPS

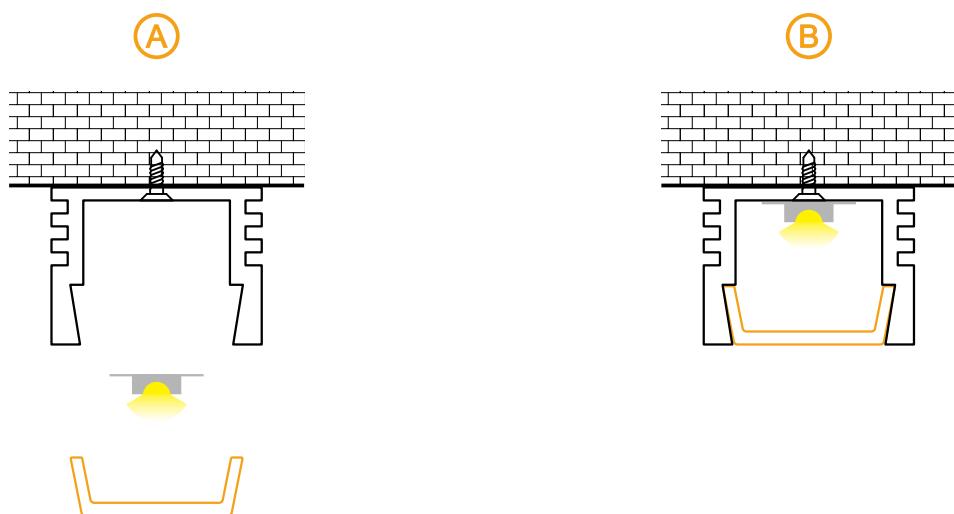

NOTE: Fixing screws must be fully recessed and provide flat surface for LED