

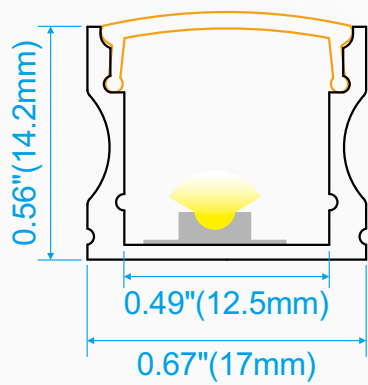


ALUMINUM PROFILE


17x16mm

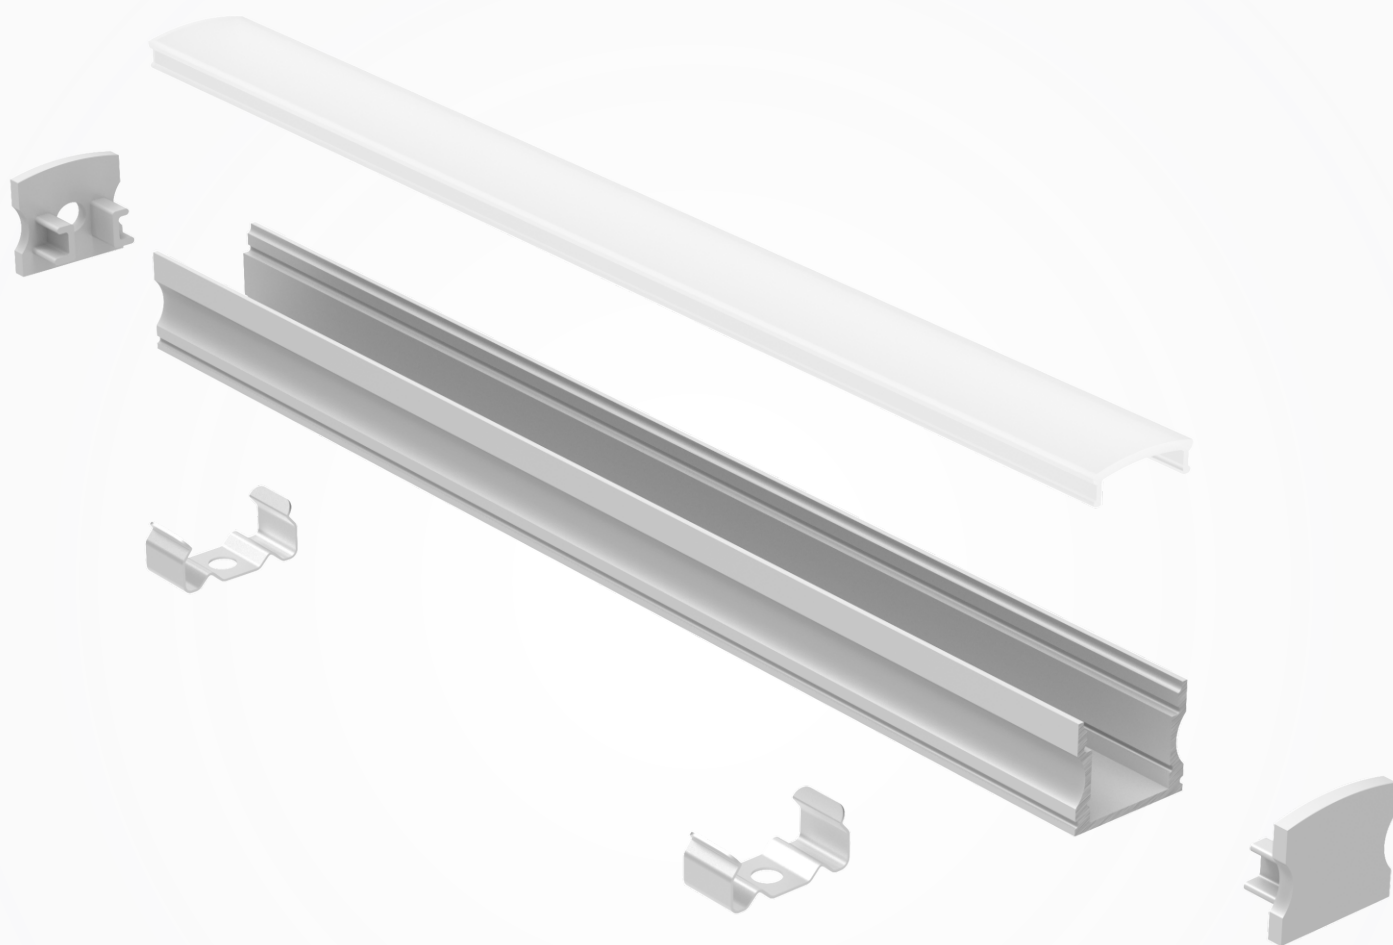

ALUMINUM PROFILE

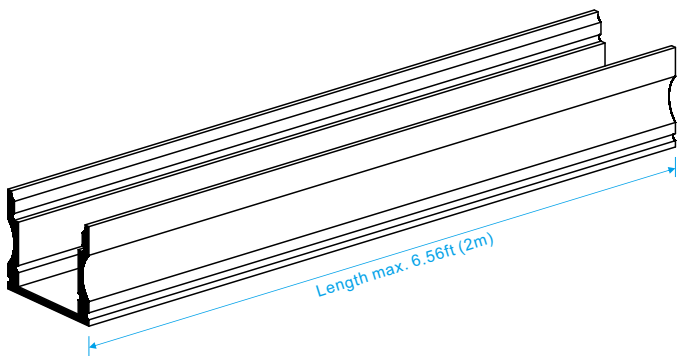

- ◆ 6063 T5 Anodised aluminium
- ◆ Heat Sink and physical protection to the LEDs
- ◆ Suitable for Max. 12mm width LED flexible strips
- ◆ Available length 2m

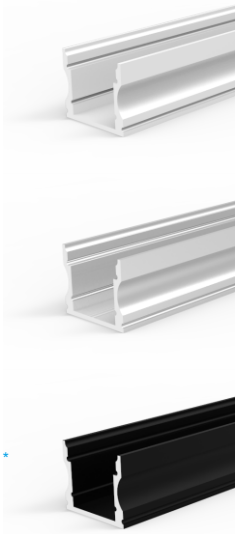


- Powder Coat White
- Silver Anodized
★ standard color
- Black Anodized

DIFFUSER

This opal polycarbonate diffuser is made from premium quality material enabling up to 86% light transmission. It provides LED protection and reduces visual LED light points


Color	Opal
Material	PC
Working Temperature	-50°C ~ 100°C
Light Transmission	86%
Coefficient Diffusion	Medium
Method of Assembly	Push in

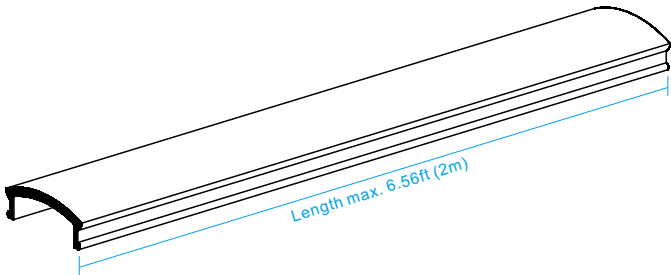


- Polycarbonate Diffuser**
- 1.Clear
 - 2.Opal (standard)
 - 3.Matt Black

INSTALLATION GUIDE

METHOD 1 - SURFACE MOUNTING WITH CLIPS

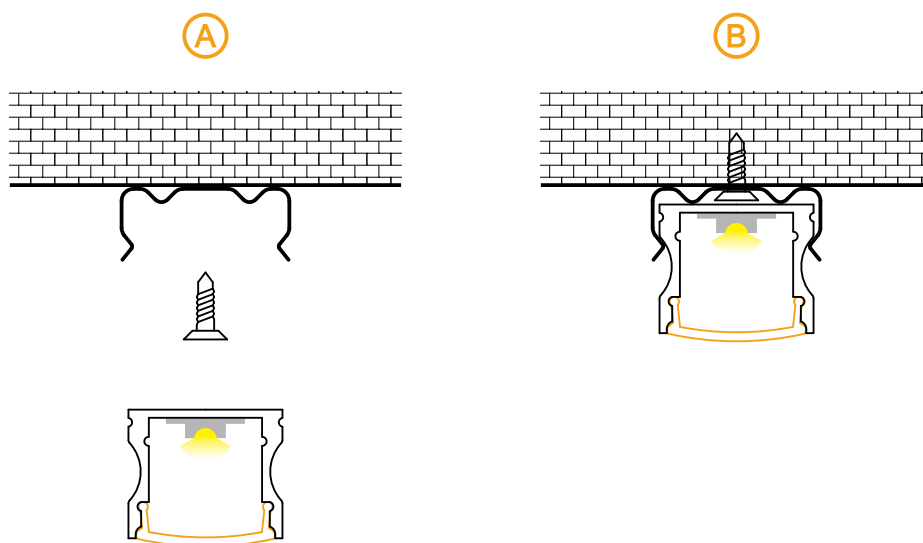

METHOD 2 - SURFACE MOUNTING WITHOUT CLIPS

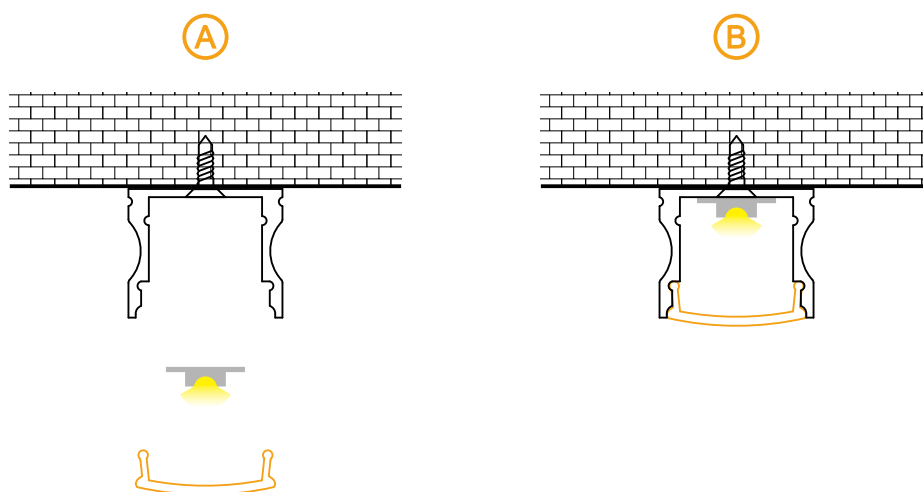

NOTE: Fixing screws must be fully recessed and provide flat surface for LED