
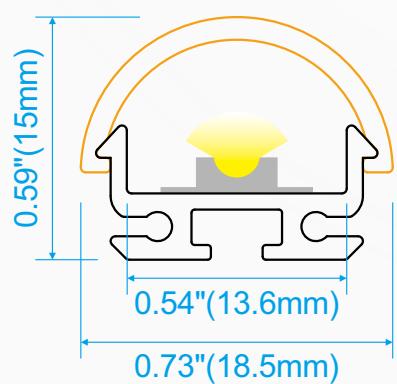



# XD1815 | 18x15mm

ALUMINUM PROFILE

**light** rail

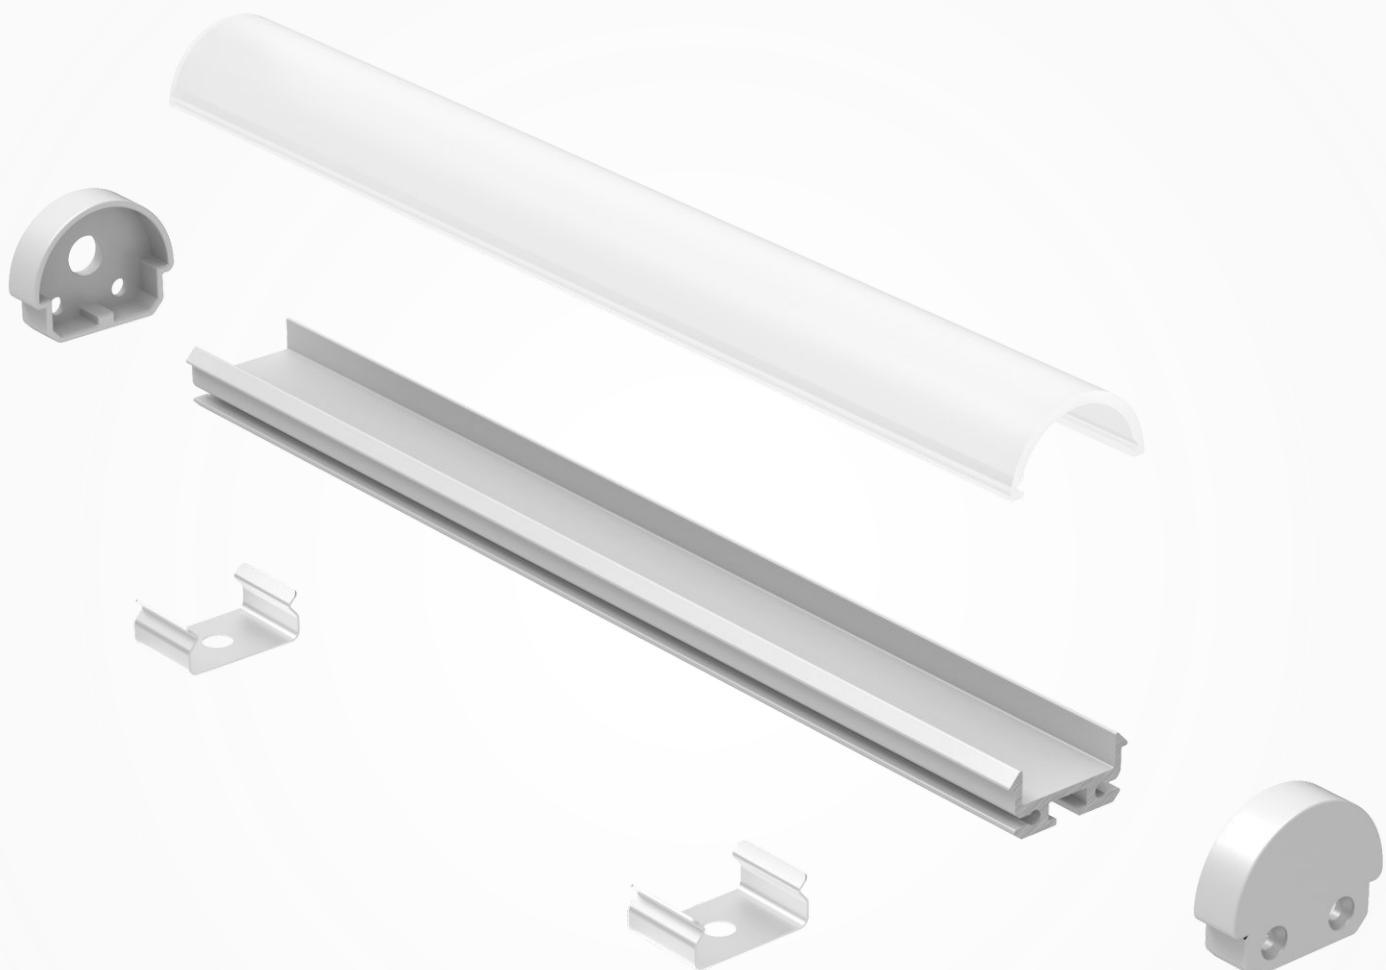


## ALUMINUM PROFILE

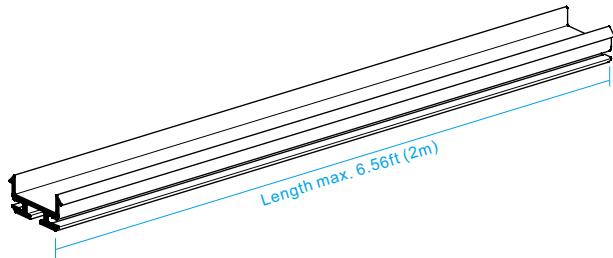

 Powder Coat White



 Silver Anodized  
\* standard color




 Black Anodized

- ◆ 6063 T5 Anodised aluminium
- ◆ Heat Sink and physical protection to the LEDs
- ◆ Suitable for Max. 12mm width LED flexible strips
- ◆ Available length 2m

## DIFFUSER

This opal polycarbonate diffuser is made from premium quality material enabling up to 86% light transmission. It provides LED protection and reduces visual LED light points


Color	Opal
Material	PC
Working Temperature	-50°C ~ 100°C
Light Transmission	86%
Coefficient Diffusion	Medium
Method of Assembly	Push in

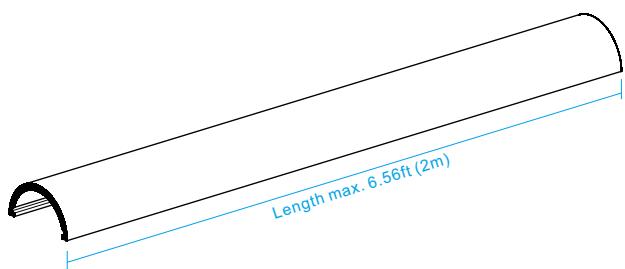


**Polycarbonate Diffuser**  
1. Clear  
2. Opal (standard)  
3. Matt Black

## INSTALLATION GUIDE

### METHOD 1 - SURFACE MOUNTING WITH CLIPS

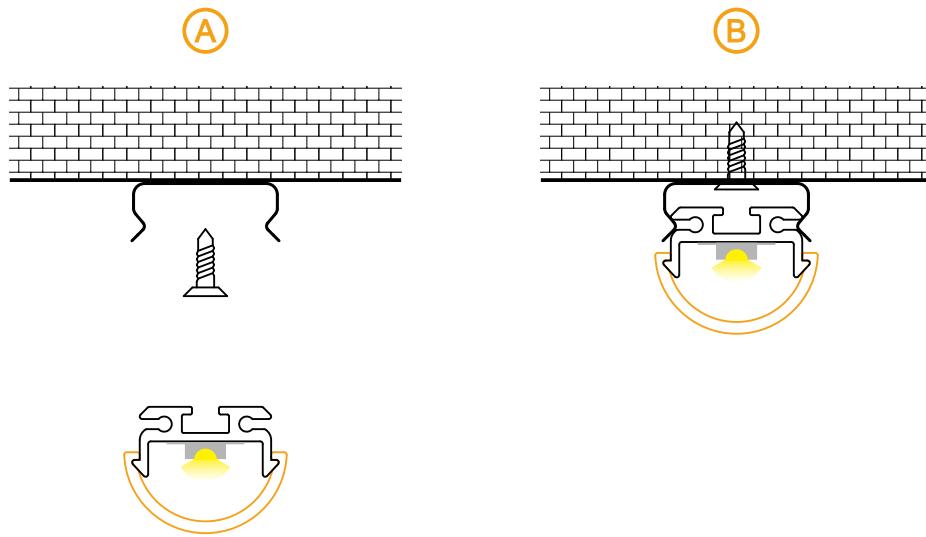

### METHOD 2 - SURFACE MOUNTING WITHOUT CLIPS

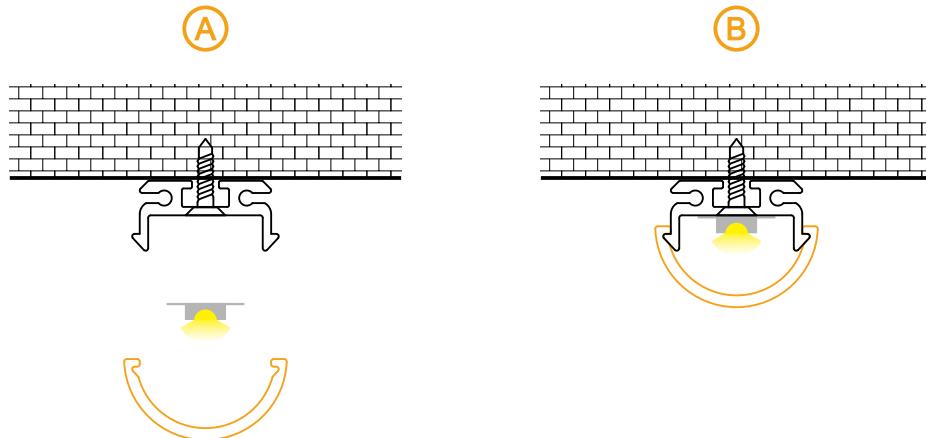

**NOTE:** Fixing screws must be fully recessed and provide flat surface for LED