
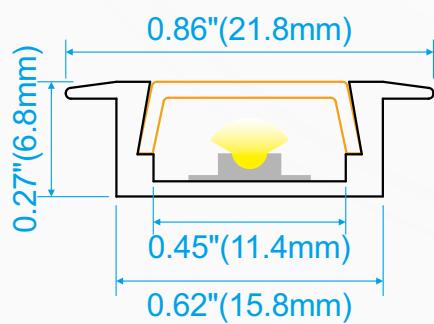



XD2207R | 22x7mm

ALUMINUM PROFILE

light rail

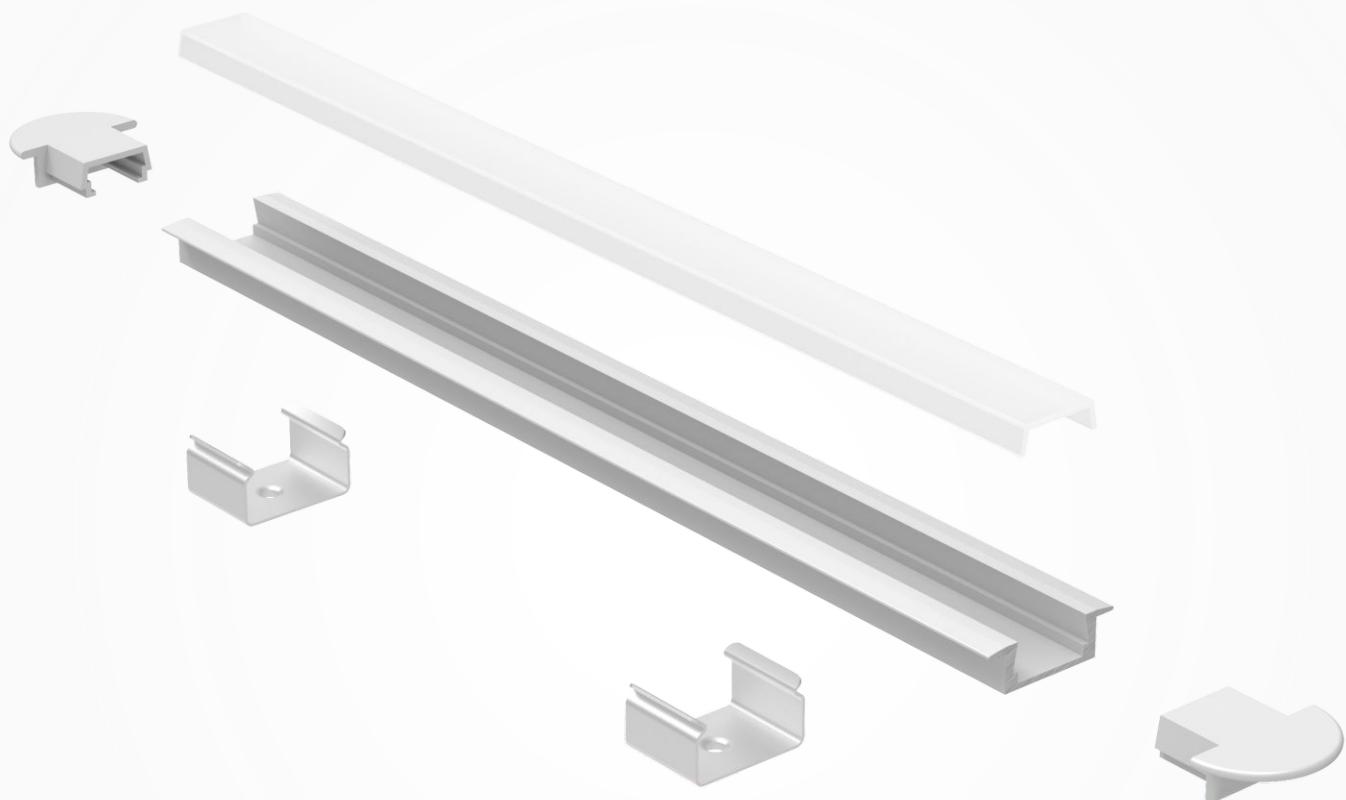

ALUMINUM PROFILE

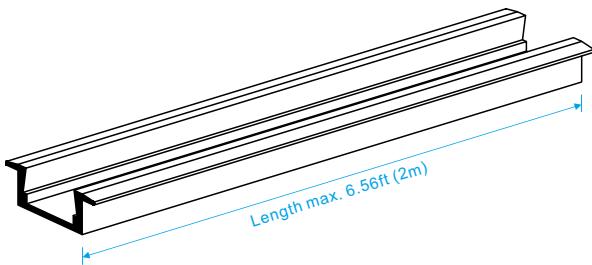

Powder Coat White



Silver Anodized
* standard color




Black Anodized

- ◆ 6063 T5 Anodised aluminium
- ◆ Heat Sink and physical protection to the LEDs
- ◆ Suitable for Max. 10mm width LED flexible strips
- ◆ Available length 2m

DIFFUSER

This opal polycarbonate diffuser is made from premium quality material enabling up to 86% light transmission. It provides LED protection and reduces visual LED light points


Color	Opal
Material	PC
Working Temperature	-50°C ~ 100°C
Light Transmission	86%
Coefficient Diffusion	Medium
Method of Assembly	Push in

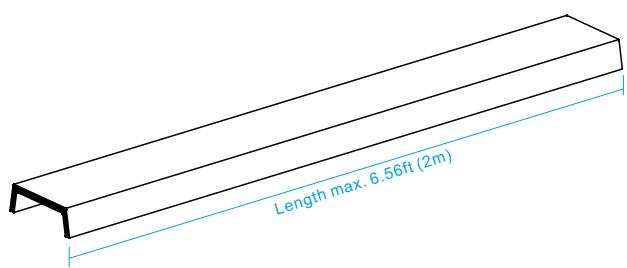


Polycarbonate Diffuser
1. Clear
2. Opal (standard)
3. Matt Black

INSTALLATION GUIDE

METHOD 1 - SURFACE MOUNTING WITH CLIPS

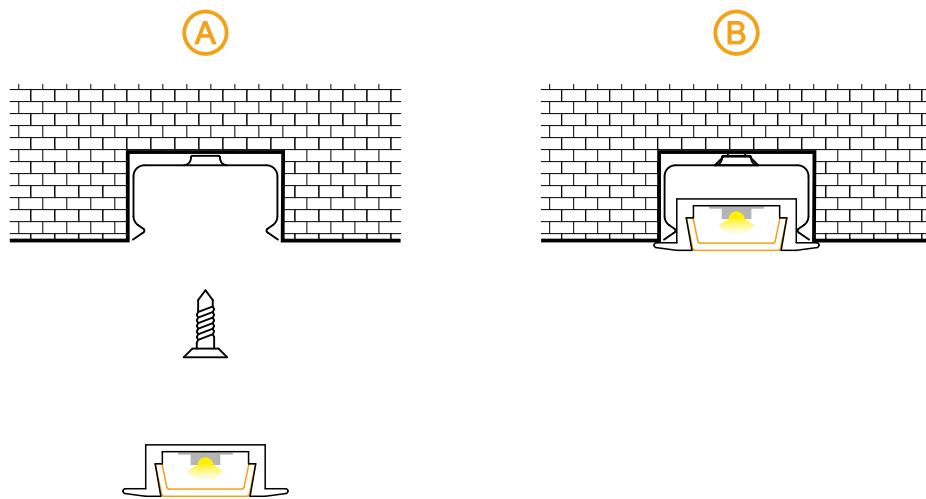

METHOD 2 - SURFACE MOUNTING WITHOUT CLIPS

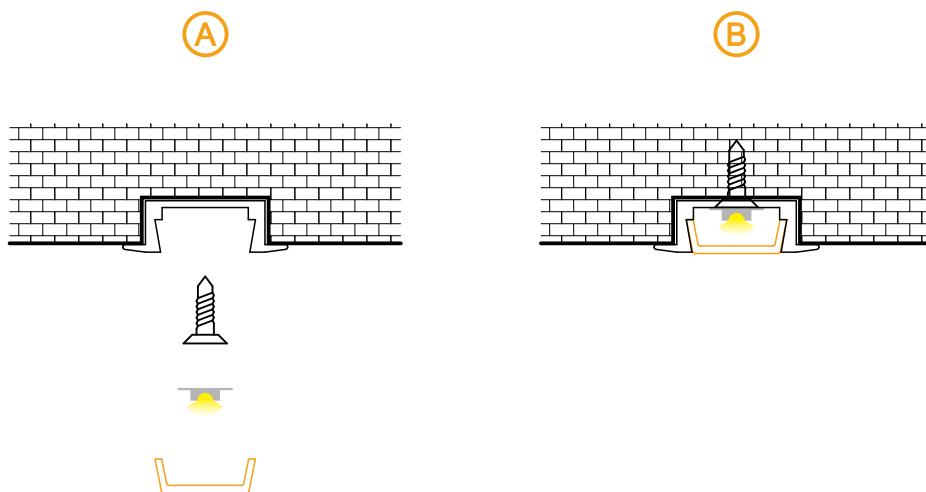

NOTE: Fixing screws must be fully recessed and provide flat surface for LED