
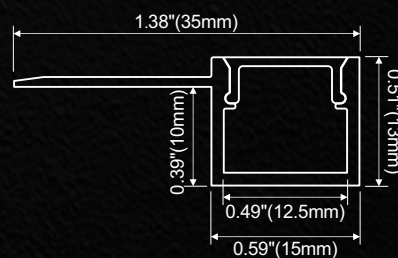


XD1213FTR | 35x13mm

ALUMINUM PROFILE


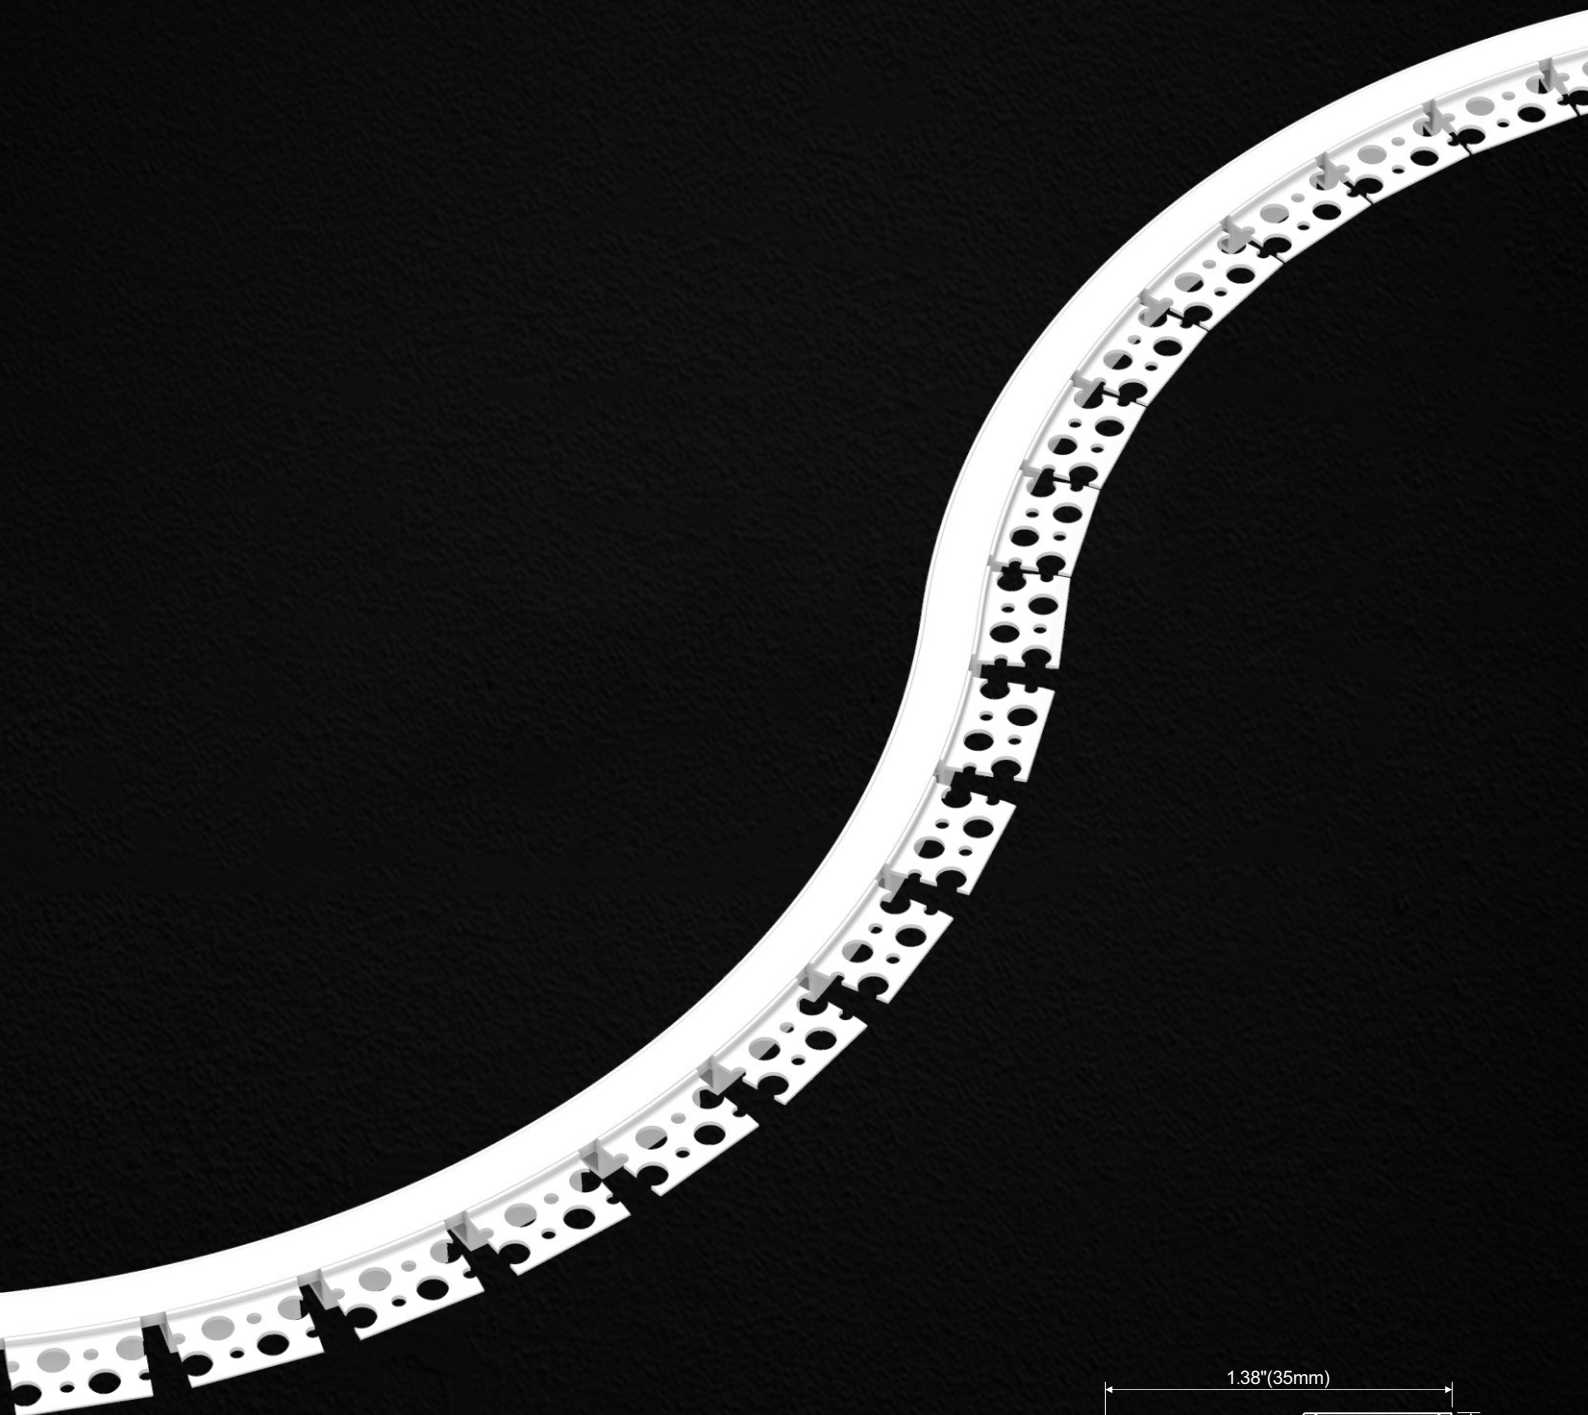


XD1213FTR | 35x13mm

ALUMINUM PROFILE




ALUMINUM PROFILE

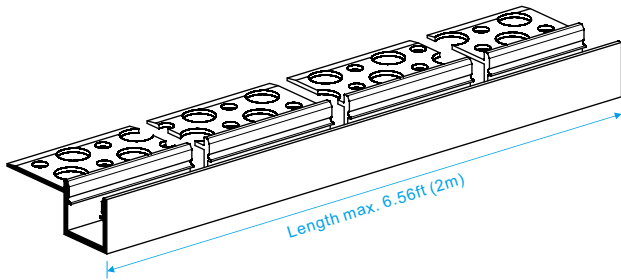

 Powder Coat White



 Silver Anodized
* standard color




 Black Anodized

- ◆ 6063 T5 Anodised aluminium
- ◆ Heat Sink and physical protection to the LEDs
- ◆ Suitable for Max. 20mm width LED flexible strips
- ◆ Available length 2m

DIFFUSER

This opal polycarbonate diffuser is made from premium quality material enabling up to 86% light transmission. It provides LED protection and reduces visual LED light points

Color	Opal
Material	Silicon Glue
Working Temperature	-50°C ~ 100°C
Light Transmission	48%
Coefficient Diffusion	Medium
Method of Assembly	Push in

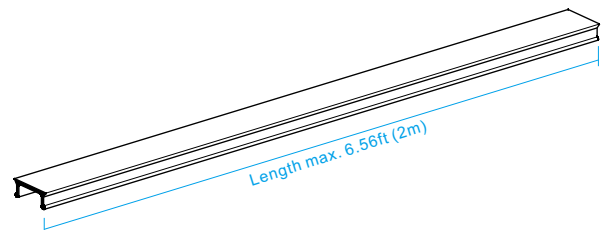

Polycarbonate Diffuser
1.Opal (standard)

INSTALLATION GUIDE

